




LEFT ELEVATION

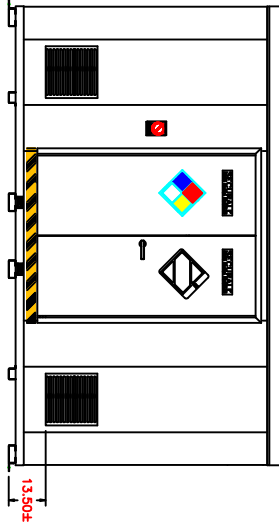


FRONT ELEVATION

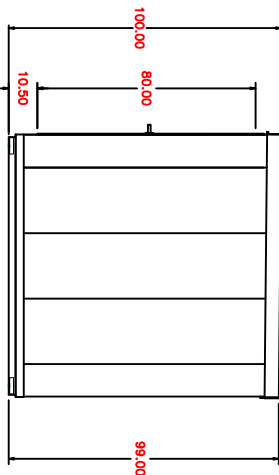

RIGHT ELEVATION

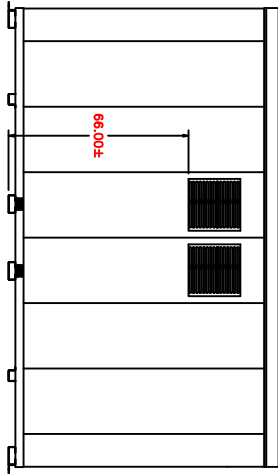

REAR ELEVATION

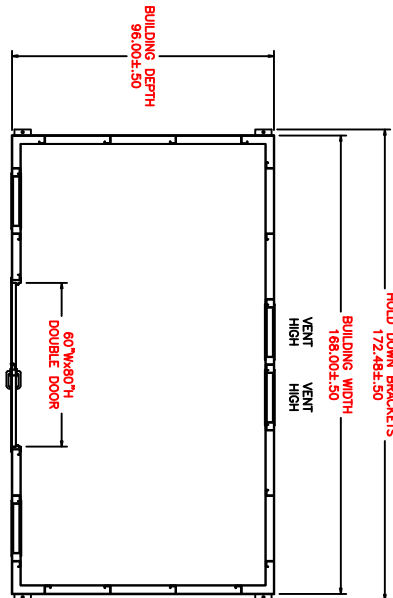

PLAN VIEW

Color: GRAY (Standard color unless otherwise noted)  
Model 2400 All Models Non-Rated

Exterior Dimensions	100Hx168Wx36D	FR2	FR4
55 gal Drum Capacity	24	---	---
Interior Dimensions	---	87.5Hx162Wx90D	85.25Hx157.5Wx85.5D
Interior Area	---	101.25	93.5
Sump Capacity (gal)	---	393	393


CAUTION

A&A Securall has made every attempt to interpret the specifications of your Purchase Order, as the product is being manufactured. By signing this drawing, you are approving the specifications as the product is being manufactured. The product will be built in accordance with this drawing and invoice as such. Deviations will be addressed in a revised drawing.

IMPORTANT NOTES:

1. All standard electrical is 120/240 volts, if installed.
2. Location and quantity of devices, fixtures and conduit may vary based on product manufacturer's specifications and recommendations and authority having jurisdiction's recommendations and authority having jurisdiction's.
3. Revisions to customer drawings may result in increased engineering fees. Please consult with your sales representative for details.
4. By signing this document you are accepting the possibility that State Design Certification may be required for your building and assume responsibility that you, the customer, will be invoiced accordingly if it is required.

DEALER/CONTRACTOR APPROVAL		END USER APPROVAL	
SIGNATURE	PRINT NAME	SIGNATURE	PRINT NAME
DATE	DATE	DATE	DATE



A&A SHEET METAL PRODUCTS, INC.  
5122 NORTH STATE ROAD 39  
LA PORTE, IN 46350



THIS DOCUMENT AND ALL INFORMATION HEREIN IS PROPRIETARY AND SHALL NOT BE DISCLOSED OUTSIDE YOUR ORGANIZATION, NOR SHALL IT BE DUPLICATED, USED OR DISCLOSED FOR PURPOSES OTHER THAN AS PERMITTED UNDER WRITTEN AGREEMENT WITH SECURALL PRODUCTS.

SERIAL NO.	DRAWN DATE	SCALE:	REVISION NO.	SITE LOCATION:
TITLE	SALES REP DATE			
PART NO.				
CUSTOMER DRAWING			SHEET NO.	
B2400				