

STI EXIT SIGN DAMAGE STOPPER®



STI-9640

PRODUCT OVERVIEW

Wherever exit signs are at risk from either intentional or accidental damage, installation of our super tough wire guard is the solution to the problem. Four sizes available to cover a wide range of exit sign models available today. Installation is simple with anchors and screws provided.

BACKED BY A THREE YEAR GUARANTEE

As all STI protective covers, this Stopper is backed by a three year guarantee against breakage in normal use. It is constructed of 9-gauge, welded steel wire, coated with a tough, corrosion resistant polyester shell. To provide even greater protection against vandalism, tamper resistant screws and a matching bit are available.

KEY FEATURES

General Information

- Guards help protect exit signs against vandalism and accidental damage.
- For use in controlled environment (not intended for outdoor use).
- Three year guarantee against breakage in normal use.

Design

- Guard may reduce projected light values. Verify correct exit light requirements when using guard (NFPA 101).

Construction

- Super tough construction of 9-gauge coated steel wire makes it extremely difficult to break.

Installation

- Fast and easy installation.
- Flexible mounting options with moveable mounting clamps.
- Simple removal for light bulb replacement.

Options

- Four sizes available to cover a wide range of exit signs.
- Tamper resistant hardware is available.

STI Exit Sign Damage Stopper®

Dimensions and Technical Information

MODELS AVAILABLE

- STI-9640** Exit Sign Damage Stopper
- STI-9740** Exit Sign Damage Stopper
- STI-9741** Exit Sign Damage Stopper Ceiling Mount
- STI-9742** Exit Sign Damage Stopper Wall Mount
- KIT-82** Tamper resistant stainless steel screws, #8 X 1 1/2 in. snake eye (quantity 4)
- KIT-19038** Tamper bit for tamper resistant screws


WARRANTY

Three year guarantee against breakage in normal use.


NOTICE:

When lights are used for emergency exit corridor lighting, this guard can reduce projected light reading on floor. Verify field conditions as required by NFPA 101 life safety.

MODEL	HEIGHT	WIDTH	DEPTH
STI-9640	10.5 in. (267mm)	13.75 in. (349mm)	2.75 in. (70mm)
STI-9740	15.5 in. (394mm)	20.5 in. (520mm)	6 in. (152mm)
STI-9741	16 in. (406mm)	14.8 in. (376mm)	5.35 in. (136mm)
STI-9742	16 in. (406mm)	15.6 in. (396mm)	3.3 in. (84mm)

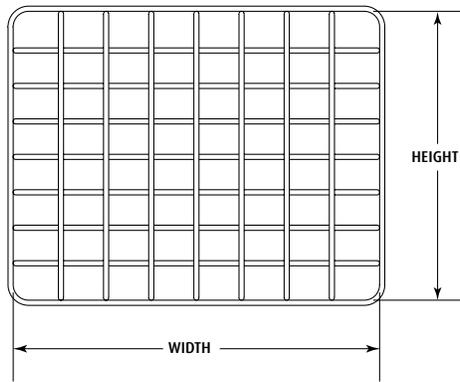

FRONT VIEW

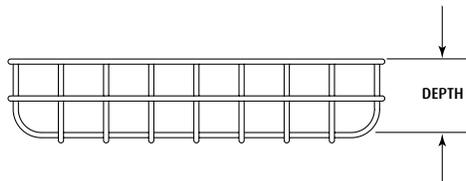

TOP VIEW



Safety Technology International

2306 Airport Road info@sti-usa.com
 Waterford, MI www.sti-usa.com
 48327, USA Tel:248-673-9898

Taylor House
 34 Sherwood Rd., Bromsgrove,
 Worcs., B60 3DR, England

info@sti-emea.com
 www.sti-emea.com
 Tel: +44 (0) 1527 520 999

Unit 7A Lockheed Avenue
 Airport Business Park
 Waterford X91 HWF2 Ireland