



Features

Power (W)	18W-21W
Lamp Type	2x 2W LED
Input Voltage	120/347 VAC
Frequency	50/60 Hz
Battery Type	Sealed Lead Acid
Working Time	30 Minutes at 275W
Charging Time	45 Hours

Description

- Durable steel housing
- Wall mountable with optional line cord included
- Input voltage: 120/347VAC 50/60Hz
- LED technology
- Two 12V12Ah sealed lead acid batteries
- 271W additional remote capability
- Test switch and charge indicator light
- Overcharge & over-discharge protection
- Backup time on battery: 30 minutes at 275 W
- Suitable for damp locations
- Operating temperature: 15 °C ~ 59 °C / 35 °F ~ 95 °F

Remote Add-ons

Unit comes with two attached 2W remote heads. You can add on up to 271W of additional remotes comprised of either or a combination of the following;




EL-7030A (180 pcs)



EL-7030B (90 pcs)

Technical Drawing

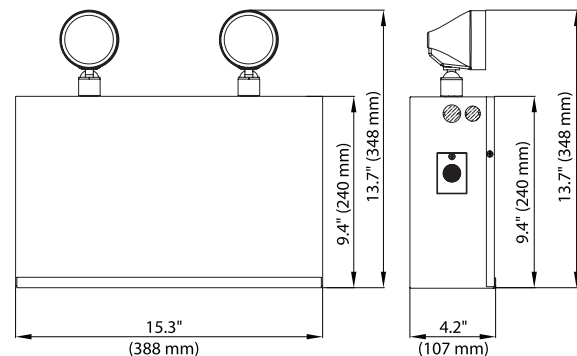

Ordering Information

Model	Description
EL-7064S	Emergency Battery Backup Unit (Remote Capable)

Canada

25 Interchange Way Vaughan, ON L4K 5W3
Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.

4575 Witmer Industrial Estates Niagara Falls, NY 14305
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com



THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.

