Safety Storage Equipment

- FM/ULC Safety Storage Cabinets
- Security Storage Products
- Safety Storage Buildings
- Fire Rated Cabinets
- Safety Containers
- Safety Smoking Receptacles



ULC Listed Flammable Liquid Safety Cabinets (Insulated)



FEATURES

Designed & labeled by the Underwriters Laboratories of Canada C1275

Quality constructed from 18 gauge steel

Double wall welded construction

2" between the inner and outer walls filled with a fire proof insulating material

Door sill raised 2" above the bottom of the cabinet to form a liquid-tight well

Three point lock on door

Adjustable satin coat galvanized shelves permit storing of various size containers

Four adjustable levelling feet

2" threaded vents, one on each side, allow for ventilation

Fire baffle covers each vent

Painted with safety yellow enamel, with red bi-lingual letters, warning: "FLAMMABLE-KEEP FIRE AWAY"

Each cabinet individually cartoned

All cabinets – double door style, extra shelves available – slight additional charge

The WB Safety Storage Cabinets will offer safer storing for flammable liquids, reduce time–consuming trips to remote storage rooms

and permit storage close to work areas

For maximum safety, fill the cabinet with approved WB Safety Cans (pg# 57)

Designed and labeled by the Underwriters Laboratories of Canada as meeting the requirements of the National Fire Code of Canada 1980 part 4 Flammable and Combustible Liquids performance clause 4.2.10.4.



HW SERIES	ULC LISTED SAFETY STORAGE CABINETS				
MODEL	PRODUCT DESCRIPTION	H"	W"	D"	WEIGHT
WB30	30 GALLON ULC APPROVED 2 MANUAL DOOR	45	44	19	350
WB45	45 GALLON ULC APPROVED 2 MANUAL DOOR	65	44	19	430
WB-S	ADDITONAL SHELVES FOR MODEL WB30 & WB45				
WB-LOCK	REPLACEMENT LOCK & ROD KIT				
WB-PAINT	TOUCHUP PAINT				

U HW Premium Quality FM Approved Safety Storage Products



FEATURES:

All welded double wall 18 Gauge construction with 1 1/2"" insulating a	ir space
2" leakproof sill to contain spills	
Lockable 3 point self latching flush mounted paddle handle with Keys	
Radius door & tub edges	
Doors are double walled. 14 gauge outside & 18 gauge inside	
4" heavy duty welded hinges with brass pins	
Twin 2" flame arrestor vents	
Adjustable leveling feet and grounding connector	
Powder coated finish	
Safety signage in large red letters. French & English	
SP Galvanized steel shelves adjust on 2 1/2" centers	
Meets OSHA, NFPA 30 & UFC 79 Standards	

DESIGN FEATURES




- 4" Heavy duty welded hindge with brass pin
- Improved self-latching doors employ spring latches for easier and safer closing
- finger tip operation

Flush mounted locking handle provides obstruction free






DOOR STYLES



Manual Self-latching Door



Concealed Self-closing, Self-latching Door



COLOURS

Grey

Blue

Putty

Red

Bi-folding, Self-closing and Self-latching Door, with fusible link

herbertwilliams



HWF FLAMMA	BLE LIQUID S	AFETY CABI	NETS FOR F	LAMMABLES IN SAFETY CANS					
MANUAL DOOR	SELF-CLOSE	BI-FOLD	CAPACITY	PRODUCT DESCRIPTION & DIMENSIONS H X W X D	SHELVES	FM	M WT	S WT	B WT
HWF6M	HWF6S	-	6	FLAMMABLE LIQUID SAFETY CABINET 1 DOOR 22 X 23 X 18	1	Ν	110	130	-
HWF12M	HWF12S	-	12	FLAMMABLE LIQUID SAFETY CABINET 1 DOOR 35 X 23 X 18	1	Y	140	160	-
HWF18M	HWF18S	-	18	FLAMMABLE LIQUID SAFETY CABINET 1 DOOR 44 X 23 X 18	1	Y	170	190	-
HWF24M	HWF24S	-	24	FLAMMABLE LIQUID SAFETY CABINET 1 DOOR 65 X 23 X 18	2	Y	234	254	-
HWF40M	HWF40S	-	40	FLAMMABLE LIQUID SAFETY CABINET 1 DOOR 44 X 23 X 34	1	Y	270	290	-
HWF22M	HWF22S	-	22	FLAMMABLE LIQUID SAFETY CABINET 2 DOOR 35 X 34 X 18	1	Y	170	190	-
HWF28M	HWF28S	-	28	FLAMMABLE LIQUID SAFETY CABINET 2 DOOR 44 X 34 X 18	1	Y	220	240	-
HWF30M	HWF30S	HWF30B	30	FLAMMABLE LIQUID SAFETY CABINET 2 DOOR 44 X 43 X 18	1	Y	240	260	270
HWF44M	HWF44S	-	44	FLAMMABLE LIQUID SAFETY CABINET 2 DOOR 65 X 34 X 18	2	Y	290	310	-
HWF45M	HWF45S	HWF45B	45	FLAMMABLE LIQUID SAFETY CABINET 2 DOOR 65 X 43 X 18	2	Y	358	378	388
HWF60M	HWF60S	HWF60B	60	FLAMMABLE LIQUID SAFETY CABINET 2 DOOR 65 X 34 X 34	2	Y	430	450	460
HWF90M	HWF90S	HWF90B	90	FLAMMABLE LIQUID SAFETY CABINET 2 DOOR 65 X 43 X 34	2	Y	470	490	500
HWF120M	-	-	120	FLAMMABLE LIQUID SAFETY CABINET 2 DOOR 65 X 59 X 34	2	Y	540	-	-
HWVC120M	-	-	120	FLAMMABLE LIQUID SAFETY CABINET COMBO UNIT 1 DRUM & 12 - 5GAL CANS	2	Y	540	-	-

u herbertwilliams

U HWP Paint & Ink Safety Storage Cabinets

FEATURES:

All welded double wall 18 gauge construction with 1-1/2" insulating air space

2" leakproof sill to contain leaks

Lockable flush mounted handle (gripper pad) with 2 keys

Doors have 3 point locking system and radius edges

Doors are double walled, 14 gauge outside & 18 gauge inside

4" heavy duty welded hinges with brass pins

Twin 2" flame arrester vents

Adjustable leveling feet

Powder coated red finish (see options)

Safety signage in large red letters

Galvanized steel shelves adjust on 2-1/2" centers

Grounding connector

Meets OSHA and NFPA code 30 & UFC 79 standards

Chemical storage maximum - Class I & II - 60 gallons, Class III - 120 gallons



INK SAFETY (CABINETS							
SELF-CLOSE	BI-FOLD	CAPACITY	PRODUCT DESCRIPTION & DIMENSIONS H X W X D	SHELVES	FM	M WT	S WT	B WT
HWP12S		12	SAFETY FLAMMABLE CABINET FOR PAINTS 22 X 23 X 18	1	Y	120	140	
HWP18S		18	SAFETY FLAMMABLE CABINET FOR PAINTS 35 X 23 X 18	2	Y	150	170	
HWP24S		24	SAFETY FLAMMABLE CABINET FOR PAINTS 44 X 23 X 18	3	Y	180	200	
HWP36S		36	SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 18	5	Y	240	260	
HWP48S	HWP48B	48	SAFETY FLAMMABLE CABINET FOR PAINTS 44 X 43 X 18	3	Y	268	286	296
HWP72S	HWP72B	72	SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 43 X 18	5	Y	400	420	430
HWP96S	HWP96B	96	SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 34 X 34	5	Y	472	492	502
HWP120S	HWP120B	120	SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 43 X 34	5	Y	500	520	512
	SELF-CLOSE HWP12S HWP18S HWP24S HWP36S HWP48S HWP72S HWP96S	HWP12S HWP18S HWP24S HWP36S HWP48S HWP48S HWP72S HWP72B HWP96S	SELF-CLOSE BI-FOLD CAPACITY HWP12S 12 HWP18S 18 HWP24S 24 HWP36S 36 HWP48S HWP48B 48 HWP72S HWP72B 72 HWP96S HWP96B 96	SELF-CLOSEBI-FOLDCAPACITYPRODUCT DESCRIPTION & DIMENSIONSH X W X DHWP12S12SAFETY FLAMMABLE CABINET FOR PAINTS 22 X 23 X 18HWP18S18SAFETY FLAMMABLE CABINET FOR PAINTS 35 X 23 X 18HWP24S24SAFETY FLAMMABLE CABINET FOR PAINTS 44 X 23 X 18HWP36S36SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 18HWP48SHWP48B48SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 18HWP72SHWP72B72SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 43 X 18HWP96SHWP96B96SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 34 X 34	SELF-CLOSEBI-FOLDCAPACITYPRODUCT DESCRIPTION & DIMENSIONSH X W X DSHELVESHWP12S12SAFETY FLAMMABLE CABINET FOR PAINTS 22 X 23 X 181HWP18S18SAFETY FLAMMABLE CABINET FOR PAINTS 35 X 23 X 182HWP24S24SAFETY FLAMMABLE CABINET FOR PAINTS 35 X 23 X 183HWP36S36SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 185HWP48SHWP48B48SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 183HWP72SHWP72B72SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 43 X 185HWP96SHW96B96SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 34 X 345	SELF-CLOSEBI-FOLDCAPACITYPRODUCT DESCRIPTION & DIMENSIONSH X W X DSHELVESFMHWP12S12SAFETY FLAMMABLE CABINET FOR PAINTS 22 X 23 X 181YHWP18S18SAFETY FLAMMABLE CABINET FOR PAINTS 35 X 23 X 182YHWP24S24SAFETY FLAMMABLE CABINET FOR PAINTS 44 X 23 X 183YHWP36S36SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 185YHWP48SHWP48B48SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 183YHWP72SHWP72B72SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 43 X 185YHWP96SHWP96B96SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 34 X 345Y	SELF-CLOSEBI-FOLDCAPACITYPRODUCT DESCRIPTION & DIMENSIONSH X W X DSHELVESFMM WTHWP12S12SAFETY FLAMMABLE CABINET FOR PAINTS 22 X 23 X 181Y120HWP18S18SAFETY FLAMMABLE CABINET FOR PAINTS 35 X 23 X 182Y150HWP24S24SAFETY FLAMMABLE CABINET FOR PAINTS 44 X 23 X 183Y180HWP36S36SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 185Y240HWP48SHWP48B48SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 183Y268HWP72SHWP72B72SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 43 X 185Y400HWP96SHWP6B96SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 34 X 345Y472	SELF-CLOSE BI-FOLD CAPACITY PRODUCT DESCRIPTION & DIMENSIONS H X W X D SHELVES FM M WT S WT HWP12S 12 SAFETY FLAMMABLE CABINET FOR PAINTS 22 X 23 X 18 1 Y 120 140 HWP18S 18 SAFETY FLAMMABLE CABINET FOR PAINTS 35 X 23 X 18 2 Y 150 170 HWP24S 24 SAFETY FLAMMABLE CABINET FOR PAINTS 44 X 23 X 18 3 Y 180 200 HWP36S 36 SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 18 5 Y 240 260 HWP48S HWP48B 48 SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 23 X 18 3 Y 268 286 HWP48S HWP48B 48 SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 43 X 18 3 Y 268 286 HWP72S HWP72B 72 SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 43 X 18 5 Y 400 420 HWP96S HWP72B 72 SAFETY FLAMMABLE CABINET FOR PAINTS 65 X 34 X 34 5 Y 492

U HWU Under Counter Flammable Liquid Safety Cabinets

FEATURES:

All welded double wall 18 gauge construction with 1-1/2" insulating air space

Furniture type kickplate (3"d x 4"h)

2" leakproof sill to contain leaks

Lockable flush mounted handle with 2 keys

Door(s) have 3 point locking system and radius edges

Door(s) are double walled, 14 gauge outside & 18 gauge inside

4" heavy duty welded hinges with brass pins

Twin 2" flame arrester vents mounted on back wall

Galvanized steel shelves, adjust on 2-1/2" centers

Adjustable leveling feet

Powder coated yellow finish (see options)

Safety signage in large red letters

Grounding connector





MODEL HWU22M EXTERIOR DIMENSIONS (H X W X D) (35 X 36 X 22)"



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS

HWU UNDER (OUNTER FLAI	MMABLE LIQ	UID SAFET	CABINETS							
MANUAL DOOR	SELF-CLOSE	BI-FOLD	CAPACITY	PRODUCT DESCRIPTION & DIMENSIONS H X V	WXD		SHELVES	FM	M WT	S WT	B WT
HWU12M	HWU12S		12	UNDER COUNTER FLAMMABLE LIQUID CABIN	INET 35 X 24 X 22 1	DOOR	1	Y	140	160	
HWU22M	HWU22S		22	UNDER COUNTER FLAMMABLE LIQUID CABIN	INET 35 X 36 X 22 2	DOORS	1	Y	170	190	
HWU30M	HWU30S		30	UNDER COUNTER FLAMMABLE LIQUID CABIN	INET 35 X 48 X 22 1	DOOR	1	Υ	220	240	

U HWV Vertical Drum Flammable Liquid Safety Cabinets

FEATURES:

.....

All welded double wall 18 gauge construction with 1-1/2" insulating air space

2" leak proof sill to contain leaks
Lockable flush mounted handle (gripper pad) with 2 keys

.

Doors have 3 point locking system and radius edges

Doors are double walled, 14 gauge outside & 18 gauge inside

4" heavy duty welded hinges with brass pins

Twin 2" flame arrester vents

Adjustable leveling feet

Powder coated yellow finish (see options)

Safety signage in large red letters

Galvanized steel depth shelf adjust on 2-1/2" centers

Complete with conveyor rollers for ease of drum entry & removal

Grounding connector

Meets OSHA and NFPA code 30 & UFC 79 standards

FM Approved





FLAMMABLE KEEP FIRE AWAY

∕≜∖

MODEL HWV120M EXTERIOR DIMENSIONS (H X W X D) (65 X 59 X 34)"



herbertwilliams



MODEL HWV55M EXTERIOR DIMENSIONS (H X W X D) (65 X 34 X 34)"

HWV VERTICA	HWV VERTICAL DRUM FLAMMABLE LIQUID SAFETY CABINETS										
MANUAL DOOR	SELF-CLOSE	BI-FOLD	CAPACITY	PRODUCT DESCRIPTION & DIMENSIONS	SHELVES	FM	M WT	S WT	B WT		
HWV55M	HWV55S		1 X (55)	SAFETY CABINET VERTICAL 55 GAL DRUM 65 X 34 X 34 C/W ROLLERS	1	Y	366	564			
HWV120M			2 X (55)	SAFETY CABINET VERT 2 X 55 GAL DRUM 65 X 59 X 34 C/W ROLLERS	1	Y	544				

U HWST Stackable Cabinets

FEATURES:

All welded double wall 18 gauge construction with 1-1/2" insulating air space

2" leakproof sill to contain leaks

Lockable flush mounted handle (gripper pad) with 2 keys

Door(s) have 3 point locking system and radius edges

 $\ensuremath{\text{Door}(s)}$ are double walled, 14 gauge outside & 18 gauge inside

4" heavy duty welded hinges with brass pins

Twin 2" flame arrester vents mounted on back wall

Galvanized steel shelves, adjust on 2-1/2" centers

Adjustable leveling feet with rubber caps

Powder coated yellow finish (see options)

Safety signage in large red letters

Grounding connector

Meets OSHA, and NFPA code 30

Chemical storage maximum - Class I & II - 60 gallons, Class III -120 gallons



NFPA AND OSHA STANDARDS

HWV COUNT	HWV COUNTER TOP OR STACKABLE SAFETY CABINET											
MANUAL DOOR	SELF-CLOSE	CAPACITY	PRODUCT DESCRIPTION & DIMENSIONS	SHELVES	FM	M WT	S WT	B WT				
HWST11M	HWST11S		STACKABLE SAFETY CABINET 22 X 34 X 18	0	Y	160	165					
HWST15M	HWST15S		STACKABLE SAFETY CABINET 22 X 43 X 18	1	Y	190	195					

u herbertwilliams

MODEL HWC45M

EXTERIOR DIMENSIONS

(H X W X D) (65 X 43 X 18)"

CORROSIVES

U HWC Acid Corrosive Safety Cabinets

FEATURES:

All welded double wall 18 gauge construction with 1-1/2" insulating air space

2" leakproof sill to contain leaks

Lockable flush mounted handle (gripper pad) with 2 keys

Doors have 3 point locking system and radius edges

Doors are double walled, 14 gauge outside & 18 gauge inside

4" heavy duty welded hinges with brass pins

Twin 2" flame arrester vents

Adjustable leveling feet

Powder coated blue finish

Safety signage in large white letters

Galvanized steel shelves adjust on 2-1/2" centers

Polyethylene tray liner for shelves & sill

Grounding connector

AVAILABLE IN:

Manual close doors (open to full 180°)

Self-close door(s) shut, index and latch automatically as fusible link(s) melt under fire conditions at 165°

Bi fold doors (shut and latch automatically as fusible link melts under fire conditions at $165^\circ)$



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS POLY SHELVES HWPT18X43 18"D X 43" W

MODEL HWC30M

EXTERIOR DIMENSIONS

(H X W X D)

(44 X 43 X 18)"

CORROSIVES



HWC ACID CO	RROSIVE SAFI	ETY CABINE	ſS						
MANUAL DOOR	SELF-CLOSE	BI-FOLD	CAPACITY	PRODUCT DESCRIPTION & DIMENSIONS H X W X D	SHELVES	FM	M WT	S WT	B WT
HWC6M	HWC6S		6	ACID & CORROSIVE SAFETY STORAGE CABINET 22 X 23 X 18	1	Y	120	140	
HWC12M	HWC12S		12	ACID & CORROSIVE SAFETY STORAGE CABINET 35 X 23 X 18	1	Y	140	160	
HWC18M	HWC18S		18	ACID & CORROSIVE SAFETY STORAGE CABINET 44 X 23 X 18	1	Y	170	190	
HWC24M	HWC24S		24	ACID & CORROSIVE SAFETY STORAGE CABINET 65 X 23 X 18	1	Y	234	254	
HWC30M	HWC30S	HWC30B	30	ACID & CORROSIVE SAFETY STORAGE CABINET 44 X 43 X 18	1	Y	248	268	278
HWC45M	HWC45S	HWC45B	45	ACID & CORROSIVE SAFETY STORAGE CABINET 65 X 43 X 18	2	Y	370	390	400
HWC60M	HWC60S	HWC360B	60	ACID & CORROSIVE SAFETY STORAGE CABINET 65 X 34 X 34	2	Y	442	462	472

HWUC UNDER COUNTER ACID CORROSIVE SAFETY CABINETS											
MANUAL DOOR	SELF-CLOSE	BI-FOLD	CAPACITY	PRODUCT DESCRIPTION & DIMENSIONS H X W X D	SHELVES	FM	M WT	S WT	B WT		
HWUC12M	HWUC12S		12	UNDER COUNTER ACID & CORROSIVE CABINET 35 X 24 X 22 1 DOOR	1	Y	140	160			
HWUC22M	HWUC22S		22	UNDER COUNTER ACID & CORROSIVE CABINE 35 X 36 X 22 2 DOORS	1	Y	170	190			
HWUC30M	HWUC30S		30	UNDER COUNTER ACID & CORROSIVE CABINE 35 X 48 X 22 1 DOOR	1	Y	220	240			

U HWPEST Pesticide Safety Cabinets

FEATURES:

All welded double wall 18 gauge construction with 1-1/2" insulating air space

2" leakproof sill to contain leaks

Lockable flush mounted handle (gripper pad) with 2 keys

Doors have 3 point locking system and radius edges

Doors are double walled, 14 gauge outside & 18 gauge inside

4" heavy duty welded hinges with brass pins

Twin 2" flame arrester vents

Adjustable leveling feet

Powder coated forest green finish

Safety signage in large red letters

Galvanized steel shelves adjust on 2-1/2" centers

Polyethylene tray liner for shelves & sill

Grounding connector



* Factory mutual approval designed in accordance with NFPA and osha standards



NEW Product!

MODEL HWPEST30M EXTERIOR DIMENSIONS (H X W X D) (44 X 43 X 18)"



	PEST PESTICI	PEST PESTICIDE SAFETY CABINETS												
	MANUAL DOOR	SELF-CLOSE	BI-FOLD	CAPACITY	PRODUCT DESCRIPTION	ON & DIMENSIONS	SHELVES	FM	M WT	S WT	B WT			
	HWPEST6M	HWPEST6S		6	PESTICIDE SAFETY CABI	NET 22 X 23 X 18	1	Ν	120	140				
	HWPEST12M	HWPEST12S		12	PESTICIDE SAFETY CABI	NET 35 X 23 X 18	1	Y	140	160				
/2"	HWPEST18M	HWPEST18S		18	PESTICIDE SAFETY CABI	NET 44 X 23 X 18	1	Y	170	190				
	HWPEST24M	HWPEST24S		24	PESTICIDE SAFETY CABI	NET 65 X 23 X 18	2	Y	234	254				
sill	HWPEST30M	HWPEST30S	HWPEST30B	30	PESTICIDE SAFETY CABI	NET 44 X 43 X 18	1	γ	248	268	268			
311	HWPEST45M	HWPEST45S	HWPEST45B	45	PESTICIDE SAFETY CABI	NET 65 X 43 X 18	2	Y	370	390	390			
	HWPEST60M	HWPEST60S	HWPEST60B	60	PESTICIDE SAFETY CABI	INET 65 X 34 X 34	2	Y	442	462	462			

HWL Flammable Liquid Safety Cabinets with Legs

FEATURES:

All welded double wall 18 gauge construction with 1-1/2" insulating air space

2" leakproof sill to contain leaks

Lockable flush mounted handle (gripper pad) with 2 keys

Doors have 3 point locking system and radius edges

Doors are double walled, 14 gauge outside & 18 gauge inside

4" heavy duty welded hinges with brass pins

Twin 2" flame arrester vents

Adjustable leveling feet

5" high feet

Legs allow moving unit with fork lift truck

Powder coated yellow finish (see options)

Safety signage in large red letters

Galvanized steel shelves adjust on 2-1/2" centers

Grounding connector

Meets OSHA and NFPA code 30 & UFC 79 standards



MODEL HWL45M EXTERIOR DIMENSIONS (H X W X D) (69 X 43 X 18)"



FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS

S)	HWL FLAMM	ABLE LIQUID	SAFETY	CABINETS	WITH LEGS					
	MANUAL DOOR	SELF-CLOSE	BI-FOLD	CAPACITY	PRODUCT DESCRIPTION & DIMENSIONS	SHELVES	FM	M WT	S WT	B WT
) "	HWL28M	HWL28S		28	SAFETY CABINET 2 DOOR 48 X 34 X 18	1	Y	230	250	
-	HWL30M	HWL30S	HWL30B	30	SAFETY CABINET 2 DOOR 48 X 43 X 18	2	Y	250	270	290
	HWL44M	HWL44S	HWL45B	44	SAFETY CABINET 2 DOOR 69 X 34 X 18	2	Y	300	320	388
	HWL45M	HWL45S	HWL60B	45	SAFETY CABINET 2 DOOR 69 X 43 X 18	2	Y	368	388	460
79	HWL60M	HWL60S	HWL90B	60	SAFETY CABINET 2 DOOR 69 X 34 X 34	2	Y	440	460	500
15	HWL90M	HWL90S		90	SAFETY CABINET 2 DOOR 69 X 43 X 34	2	Y	480	500	
	HWL120M			120	SAFETY CABINET 2 DOOR 69 X 59 X 34	2	Y	550		

U HWF OG/LP Oxygen Gas/Liquid Propane Vertical Security Storage Cabinets

FEATURES:

Lockable mesh doors with slide bolt hasp (no lock) All welded - ready to use 13 gauge flattened mesh sides 14 gauge top 1-1/2" x 3/16" thick corner angles Foot pads with pre-drilled holes Powder coated safety yellow Safety signage in large red letters Adjustable Safety retention chains

Meets OSHA 1910.110

NFPA 58-113 Standard

Meets CSA B149.2





HWOG OXYGEN GAS SAFETY / SECURITY STORAGE CABINETS										
MANUAL DOOR SELF-CLOSE BI-FOLD	CAPACITY	PRODUCT DESCRIPTION & DIMENSIONS	SHELVES	FM	M WT	S WT	B WT			
HW0G10S	10	VERTICAL GAS CYLINDER CABINET 70 X 33 X 38	0	Y	204	-	-			
HW0G20S	10 TO 20	VERTICAL GAS CYLINDER CABINET 70 X 60 X 38	0	Y	360	-	-			

HWLP LIQUID PROPANE VERTICAL SECURITY STORAGE CABINETS									
MANUAL DOOR SELF-CLOSE BI-FOLD	CAPACITY	PRODUCT DESCRIPTION & DIMENSIONS	SHELVES	FM	M WT	S WT	B WT		
HWLP2VS	2	VERTICAL GAS CYLINDER CABINET 35 X 18 X 30	1		170	-	-		
HWLP4VS	4	VERTICAL GAS CYLINDER CABINET 35 X 30 X 30	1		-	-	-		
HWLP6VS	6	VERTICAL GAS CYLINDER CABINET 35 X 42 X 30	1		-	-	-		
HWLP8VS	8	VERTICAL GAS CYLINDER CABINET 70 X 30 X 30	2		280	-	-		
HWLP12VS	12	VERTICAL GAS CYLINDER CABINET 70 X 33 X 38	2		340	-	-		
HWLPOG	COMBO	COMBINATION CYLINDER CABINET 70 X 62 X 38	2		490	-	-		

U HWS Additional Shelves & Accessories

FEATURES:

Add more shelving to increase space or replace damaged shelves with HW Series premium galvanized finished shelves

Available in a variety of sizes to fit every HW Series Safety Cabinet

HW Series polyethylene shelf trays are designed to contain Chemical / Flammable Liquid Spills and help protect the cabinet interior against the effects of corrosion



IIIIIIII



SECURALL[®] Brand Premium Quality Safety Cabinets

FEATURES

Finished in Two Coats of Epoxy Enamel 3-Points Self-Latching Doors Reinforced 18 Gauge All Welded Construction Galvanized Steel Shelves Adjustable On Half Inch Centers Adjustable Zinc Plated Leveling Legs Continuous Piano Hinge Double Wall Construction with 1 1/2" Air Space Flush mounted locking handle Static Ground Connections Leak Proof Sill 2" Deep, Prevents Leakage in the Event of Accidental Spills Two 2" Vents with Flash Arrestors





herbertwilliams



DESIGN FEATURES




Improved self–latching doors employ spring latches for easier and safer closing



Flush mounted locking handle provides obstruction free finger tip operation


DOOR STYLES



STANDARD SELF-LATCHING TWO DOOR

Manual Closing Doors

Comply With OSHA Regulations Designed In Accordance With The Standards Of NFPA Code 30 Meet Specifications For Factory Mutual Approval



SELF-CLOSING AND SELF-LATCHING SAFE T DOOR

When cabinet is opened, fusible links can be engaged to hold doors in the open position

In case of fire or high temperature (165°F), the links melt and the doors automatically close and latch to protect contents of cabinet

Hydraulically operated doors open to a full 180° to prevent aisle obstruction



SELF-CLOSING AND SELF-LATCHING SLIDING DOOR, WITH FUSIBLE LINK

Spring loaded with hydraulic cylinder for smooth and safe operation

Cabinet automatically closes after each use

Fusible link allows door to be latched open for easy access, in case of fire or high temperature (165°F), link melts and door automatically slides closed.

Available In Styles And Capacities To Suit Your Needs . . . For Business, Industry And Institutions



Flammables in Safety Cans



Popular models are FM approved A110

A310

A130

A230

A330

A131

A231

A331

A145

A245

A345

A160

A260

A360

A190

A290

A390

FM*†

FM*†

FM*†

FM*+

FM*†

*†

*†

*†

16 GAL. SELF-LATCH STANDARD DOOR

30 GAL. SELF-LATCH STANDARD 2-DOOR

30 GAL. SELF-LATCH STANDARD 2-DOOR

45 GAL. SELF-LATCH STANDARD 2-DOOR

60 GAL. SELF-LATCH STANDARD 2-DOOR

90 GAL. SELF-LATCH STANDARD 2-DOOR

16 GAL. SELF-CLOSE. SELF-LATCH SAFE-T-DOOR

30 GAL. SELF-CLOSE, SELF-LATCH SLIDING DOOR

30 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR

30 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR

30 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR

45 GAL. SELF-CLOSE. SELF-LATCH SLIDING DOOR

45 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR

60 GAL. SELF-CLOSE, SELF-LATCH SLIDING DOOR

60 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR

90 GAL. SELF-CLOSE, SELF-LATCH SLIDING DOOR

90 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR



*Complies with OSHA regulations. FM-Factory Mutual Approved † All cabinets are designed in accordance with specifications set forth by the National Fire Protection Association

1

1

1

1

1

1

1

1

1

2

2

2

2

2

2

2

2

2

MISC. SIZED CONTAINERS

MISC. SIZED CONTAINERS

6/5 GAL. SAFETY CANS

6/5 GAL. SAFETY CANS

6/5 GAL. SAFETY CANS

MISC. SIZED CONTAINERS

MISC. SIZED CONTAINERS

MISC. SIZED CONTAINERS

9/5 GAL. SAFETY CANS

9/5 GAL. SAFETY CANS

9/5 GAL. SAFETY CANS

12/5 GAL. SAFETY CANS

12/5 GAL. SAFETY CANS

12/5 GAL. SAFETY CANS

18/5 GAL. SAFETY CANS

18/5 GAL. SAFETY CANS

18/5 GAL. SAFETY CANS

44 X 24 X 18

46 X 24 X 18

44 X 43 X 18

44 X 43 X 18

46 X 43 X 18

35 X 36 X 24

35 X 36 X 24

37 X 36 X 24

65 X 43 X 18

65 X 43 X 18

67 X 43 X 18

65 X 34 X 34

65 X 34 X 34

67 X 34 X 34

65 X 43 X 34

65 X 43 X 34

67 X 43 X 34

164

174

247

252

267

220

223 235

337

342

357

397

402

419

461

466

490

SECURALL Acid / Corrosive Storage **FEATURES** MODEL # C145 CORRUSIVES EXTERIOR DIMENSIONS Benchtop Flammable/ Corrosive Storage (H X W X D) MODEL # C124 (65 X 43 X 18)" Cabinets for both flammable and **EXTERIOR** contain accidental spills nonflammable corrosives DIMENSIONS (H X W X D) Comply with NFPA and OSHA requirements (36 X 35 X 22)" blue epoxy enamel paint SIES Cabinet has a 3/4" leak-proof tray top, which can completely contain a 5 pint spill

Cabinets finished in blue corrosive-resistant epoxy enamel

Shelves and bottom lined with removable polyethylene trays; tray-top cabinet lined with removable polyethylene sheet



The leak tight sump and shelves of the cabinet are equipped with removable corrosive-resistant polyethylene trays to

herbertwilliams

Cabinets are finished in corrosive-resistant

Large warning label reads: Caution Corrosives or choose your own special message or wording

MODEL # C230 EXTERIOR DIMENSIONS (H X W X D) (44 X 43 X 18)"

Available in 24, 30, CABINETS FOR STORING CORROSIVES / FLAMMABLES / ACIDS 4 Ca si

Available III 24, 30,	UADINE		UNING UUTINUSIVES / TEAMIMADEES / AUDS				
45 and 60 gallon capacities. Other	MODEL NO.	TEST LAB Approval	DESCRIPTION	NO. OF Shelves/trays	CAPACITIES	EXTERIOR DIMENSIONS Approx. (H x w x d) in.	SHIPPING WEIGHT Approx. (LBS.)
sizes on request.	C124	FM*†	24 GAL. SELF-LATCH STANDARD 2-DOOR	1 SH/ 2 TR	MISC. SIZED CONTAINERS	36 X 35 X 22	207
	C224	*†	24 GAL. SELF-CLOSE, SELF-LATCH SLIDING DOOR	1 SH/ 2 TR	MISC. SIZED CONTAINERS	36 X 35 X 22	212
PESTICIDE	C130	FM*†	30 GAL. SELF-LATCH STANDARD 2-DOOR	1 SH/ 2 TR	6/5 GAL. SAFETY CANS	44 X 43 X 18	270
models also	C230	*†	30 GAL. SELF-CLOSE, SELF-LATCH SLIDING DOOR	1 SH/ 2 TR	6/5 GAL. SAFETY CANS	44 X 43 X 18	275
available	C330	FM*†	30 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	1 SH/ 2 TR	6/5 GAL. SAFETY CANS	46 X 43 X 18	290
aranasio	C145	FM*†	45 GAL. SELF-LATCH STANDARD 2-DOOR	2 SH/ 3 TR	9/5 GAL. SAFETY CANS	65 X 43 X 18	363
IMPORTANT:	C245	*†	45 GAL. SELF-CLOSE, SELF-LATCH SLIDING DOOR	2 SH/ 3 TR	9/5 GAL. SAFETY CANS	65 X 43 X 18	368
Not recommended	C345	FM*†	45 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	2 SH/ 3 TR	9/5 GAL. SAFETY CANS	67 X 43 X 18	383
for the storage of	C160	FM*†	60 GAL. SELF-LATCH STANDARD 2-DOOR	2 SH/ 3 TR	12/5 GAL. SAFETY CANS	65 X 34 X 34	418
Nitric Acid and/or	C260	*†	60 GAL. SELF-CLOSE, SELF-LATCH SLIDING DOOR	2 SH/ 3 TR	12/5 GAL. SAFETY CANS	65 X 34 X 34	423
interest and/or	C360	FM*†	60 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	2 SH/ 3 TR	12/5 GAL. SAFETY CANS	67 X 34 X 34	440

SECURALL Paint and Ink Storage

FEATURES

Safety storage cabinets for 1-gallon paint cans, (Class III liquids) are available in 20, 40, 60 and 120 gallon capacities

Finished in yellow epoxy enamel, with warning label reads "Flammable-Keep Fire Away", if required in red please specify

Perfect for print shops or auto body repair

Constructed to the same rigid requirements as cabinets for safety cans, available in 3 door styles

PAINT AND INK STORAGE



MODEL # P360 EXTERIOR DIMENSIONS (H X W X D) (67 X 43 X 18)"



MODEL # P140 **EXTERIOR** DIMENSIONS (H X W X D) (44 X 43 X 18)"

MODEL TEST LAB DESCRIPTION NO. OF CAPACITIES **EXTERIOR DIMENSIONS** SHIPPING WEIGHT NO. APPROVAL SHELVES APPROX. (H X W X D) IN. APPROX. (LBS.) 2 169 P120 FM*† 20 GAL. SELF-LATCH STANDARD DOOR 20/1 GAL. CANS 44 X 24 X 18 P320 FM*† 20 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR 2 20/1 GAL. CANS 46 X 24 X 18 179 40 GAL. SELF-LATCH STANDARD 2-DOOR 271 P140 FM*† 3 40/1 GAL. CANS 44 X 43 X 18 FM*† P240 40 GAL. SELF-CLOSE, SELF-LATCH SLIDING DOOR 40/1 GAL. CANS 44 X 43 X 18 276 3 P340 FM*† 291 40 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR 3 40/1 GAL. CANS 46 X 43 X 18 Popular models 373 P160 FM*† 60 GAL. SELF-LATCH STANDARD 2-DOOR 5 60/1 GAL. CANS 65 X 43 X 18 are FM approved 60 GAL. SELF-CLOSE, SELF-LATCH SLIDING DOOR 278 P260 FM*† 5 60/1 GAL. CANS 65 X 43 X 18 P360 FM*† 60 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR 5 60/1 GAL. CANS 67 X 43 X 18 393 P1120 448 FM*† 120 GAL. SELF-LATCH STANDARD 2-DOOR 120 GALLONS 65 X 34 X 34 5 P2120 120 GAL. SELF-CLOSE, SELF-LATCH SLIDING DOOR 453 *† 5 120 GALLONS 65 X 34 X 34 P3120 FM*† 120 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR 5 120 GALLONS 67 X 34 X 34 470

FEATURES



SECURALL Laboratory Models

FEATURES

Avoid the fire and explosion hazards of unprotected flammable liquids and chemicals with convenient SECURALL Laboratory Cabinets

These cabinets are specifically designed to fit under most counters,

giving more work space on counter tops

Select from the most complete line available

Choose from Self-Latching Manual Doors or Self-Closing, Self-Latching Sliding Doors



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS



MODEL # L124 EXTERIOR DIMENSIONS (H X W X D) (35 9/16 X 35 X 22)"

• herbertwilliams

LABORA	LABORATORY CABINETS FOR STORING FLAMMABLES										
MODEL No.	TEST LAB Approval	DESCRIPTION	NO. OF Shelves	CAPACITIES	EXTERIOR DIMENSIONS APPROX. (H X W X D) IN.	SHIPPING WEIGHT APPROX. (LBS.)					
L124	FM*†	24 GAL. SELF-LATCH STANDARD, 2-DOOR	1	MISC. SIZED CONTAINERS	35 9/16 X 35 X 22	199					
L224	*†	24 GAL. SELF-CLOSE SLIDING DOOR	1	MISC. SIZED CONTAINERS	35 5/8 X 35 X 22	204					
L136	FM*†	36 GAL. SELF-LATCH STANDARD, 2-DOOR	1	MISC. SIZED CONTAINERS	35 9/16 X 47 X 22	252					
L236	*†	36 GAL. SELF-CLOSE SLIDING DOOR	1	MISC. SIZED CONTAINERS	35 5/8 X 47 X 22	257					
L144	FM*†	44 GAL. SELF-LATCH STANDARD, 4-DOOR	1	MISC. SIZED CONTAINERS	35 9/16 X 59 X 22	284					
L244	*†	44 GAL. CLOSE-SLIDING 2-DOOR	1	MISC. SIZED CONTAINERS	35 5/8 X 59 X 22	289					

SECURALL° Wall Mounted & Stackable Models

(HXWXD)



STACKABLE CABINETS

These cabinets are designed to be used as a single cabinet, to fit on top of standard 30 gallon cabinets or on top of each other

Ideal for segregating flammables or to increase the capacity of your current cabinet

MODEL # WMA 124 MODEL # WMA 112 EXTERIOR DIMENSIONS EXTERIOR DIMENSIONS (HXWXD) (44 X 43 X 12)" (18 X 43 X 18)"



WALL MOUNTED CABINETS

Maximum storage in a compact size

These cabinets will hold up to 24 gallons of flammable liquids without taking up valuable floor space

Furnished with brackets for easy wall mounting or can be placed on a bench top

Equipped with five adjustable shelves which can be positioned to meet your specific needs

MODEL # WMA 118 EXTERIOR DIMENSIONS (H X W X D) (24 X 43 X 18)"



WALL M	WALL MOUNTED & STACKABLE MODELS										
MODEL No.	TEST LAB Approval	DESCRIPTION	NO. OF Shelves	CAPACITIES	EXTERIOR DIMENSIONS APPROX. (HXWXD) IN.	SHIPPING WEIGHT APPROX. (LBS.)					
WMA112	FM*†	12 GAL. SELF-LATCH STANDARD, 2-DOOR	1	STACKABLE ON A130 CABINET	18 X 43 X 18	163					
WMA118	FM*†	18 GAL. SELF-LATCH STANDARD, 2-DOOR	1	STACKABLE ON A130 CABINET	24 X 43 X 18	190					
WMA124	FM*†	24 GAL. SELF-LATCH STANDARD, 2-DOOR	5	FOR MOUNTING ON WALL	44 X 43 X 12	227					
WMA324	FM*†	24 GAL. SELF CLOSE, SELF-LATCH SAFE-T-DOOR	5	FOR MOUNTING ON WALL	46 X 43 X 12	235					

*Complies with OSHA regulations. + All cabinets are designed in accordance with specifications set forth by the National Fire Protection Association

SECURALL Drum Storage Cabinets

FEATURES

Vertical Cabinets

Have ball bearing rollers for easy placing and removal of 55 gallon drums

From one to twelve 5-gallon safety cans can also be stored depending on the model

Horizontal Cabinets

Store one 55 gallon drum and one 5 gallon safety can

Drum cradles available

Tracks to guide Drum Cradle into position

Choose from 3 door styles

Standard color is yellow

Also available in white, red or gray



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS



EXTERIOR DIMENSIONS (H X W X D) (65 X 59 X 34)"

DC6



VERTICAL CABINET MODEL # V1500 EXTERIOR DIMENSIONS (H X W X D) (65 X 59 X 34)"



HORIZONTAL CABINET MODEL # H260 EXTERIOR DIMENSIONS (H X W X D) (50 X 34 X 50)"



Drum Cradle

800 lb. capacity permits one person to easily handle heavy 30 gal or 55 gal. drums

This cradle features ALL WELDED steel construction

Rolls smoothly on 4 inch wheels

CABINE	CABINETS FOR STORING FLAMMABLES IN DRUMS – FOR INDOOR USE ONLY								
MODEL No.	TEST LAB Approval	DESCRIPTION	NO. OF Shelves	CAPACITIES	EXTERIOR DIMENSIONS Approx. (H x w x d) in.	SHIPPING WEIGHT Approx. (LBS.)			
H160	FM*†	60 GAL. HOR. SELF-LATCH STANDARD, 2-DOOR	-	1/55 GAL. DRUM+1/5 GAL. CAN	50 X 34 X 50	384			
H260	*†	60 GAL. HOR. SELF-CLOSE, SELF-LATCH SLIDING DOOR	-	1/55 GAL. DRUM+1/5 GAL. CAN	50 X 34 X 50	389			
H360	FM*†	60 GAL. HOR. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	-	1/55 GAL. DRUM+1/5 GAL. CAN	52 X 34 X 50	414			
V160	FM*†	65 GAL. VER. SELF-LATCH STANDARD, 2-DOOR	1	1/55 GAL. DRUM+2/5 GAL. CAN	65 X 34 X 34	412			
V260	*†	65 GAL. VER. SELF-CLOSE, SELF-LATCH SLIDING DOOR	1	1/55 GAL. DRUM + 2/5 GAL. CAN	65 X 34 X 34	417			
V360	FM*†	65 GAL. VER. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	1	1/55 GAL. DRUM+2/5 GAL. CAN	67 X 34 X 34	434			
V175	FM*†	75 GAL. VER. SELF-LATCH STANDARD, 2-DOOR	1	2/30 GAL. DRUMS+3/5 GAL. CAN	65 X 43 X 34	440			
V275	*†	75 GAL. VER. SELF-CLOSE, SELF-LATCH SLIDING DOOR	1	2/30 GAL. DRUMS+3/5 GAL. CAN	65 X 43 X 34	445			
V375	FM*†	75 GAL. VER. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	1	2/30 GAL. DRUMS+3/5 GAL. CAN	67 X 43 X 34	469			
V1110	FM*†	120 GAL. VER. SELF-LATCH STANDARD, 2-DOOR	1	2/55 GAL. DRUMS+2/5 GAL. CAN	65 X 59 X 34	618			
V3110	FM*†	120 GAL. VER. SELF-CLOSING, SELF-LATCH SAFE-T-DOOR	1	2/55 GAL. DRUMS+2/5 GAL. CAN	67 X 59 X 34	647			
V1500	FM*†	115 GAL. VER. SELF-LATCH STANDARD, 2-DOOR	2	1/55 GAL. DRUM+12/5 GAL. CAN	65 X 59 X 34	636			
		ALL V-MODELS COME WITH ROLLER BOTTOMS							
DC6		DRUM CRADLE (FOR HORIZONTAL DRUM CABINET)				50			

*Complies with OSHA regulations. + All cabinets are designed in accordance with specifications set forth by the National Fire Protection Association

CABINETS FOR STORING HAZARDOUS WASTE IN DRUMS – COME WITH ROLLER BOTTOMS									
MODEL No.	test lab Approval	DESCRIPTION	NO. OF Shelves	CAPACITIES	EXTERIOR DIMENSIONS Approx. (H x w x d) in.	SHIPPING WEIGHT Approx. (LBS.)			
W1040	FM*†	60 GAL. SELF-LATCH STANDARD 2-DOOR	1	1/55 GAL. DRUM + 1/5 GAL. CAN	65 X 34 X 34	412			
W2040	*†	60 GAL. SELF-CLOSE, SELF-LATCH SLIDING	1	1/55 GAL. DRUM + 1/5 GAL. CAN	65 X 34 X 34	417			
W3040	FM*†	60 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	1	1/55 GAL. DRUM + 1/5 GAL. CAN	67 X 34 X 34	434			
W1075	FM*†	75 GAL. SELF-LATCH STANDARD 2-DOOR	1	1/55 GAL. DRUM + 3/5 GAL. CAN	65 X 43 X 34	440			
W1080	FM*†	120 GAL. SELF-LATCH STANDARD DOOR	1	2/55 GAL. DRUMS + 2/5 GAL. CAN	65 X 59 X 34	618			
CABINET	S FOR STORI	NG HAZARDOUS WASTE IN CANS							
W1045	FM*†	45 GAL. SELF-LATCH STANDARD 2-DOOR	2	9/5 GAL. SAFETY CANS	65 X 43 X 18	337			
W2045	*†	45 GAL. SELF-LATCH SLIDING DOOR	2	9/5 GAL. SAFETY CANS	65 X 43 X 18	342			
W3045	FM*†	45 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	2	9/5 GAL. SAFETY CANS	67 X 43 X 18	357			
W1060	FM*†	60 GAL. SELF-LATCH STANDARD 2-DOOR	2	12/5 GAL. SAFETY CANS	65 X 34 X 34	397			
W3060	FM*†	60 GAL. SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	2	12/5 GAL. SAFETY CANS	67 X 34 X 34	419			

herbertwilliams

SECURALL[®] LP and Oxygen Aluminum Gas Cylinder Security Cabinets

FEATURES

These heavy gauge aluminum gas cylinder cabinets provide significant advantages over conventional painted steel models

Designed for outdoor storage, these all aluminum cabinets will resist weathering and won't corrode or discolor

Just 1/3 the weight of painted steel units, SECURALL's aluminum models also offer real savings on shipping charges

All welded construction, ready to use, shipped fully assembled

These cabinets will provide years of tamper resistant storage for your LP and Oxygen gas cylinders

Meets OSHA SubPart 1910.110 requirements and NFPA 58-113 standards or CSA B149.2.



EXTERIOR DIMENSIONS (H X W X D) (65 X 30 X 32)"



MODEL # 0G20 EXTERIOR DIMENSIONS (H X W X D) (65 X 60 X 32)"

CABINET	CABINETS FOR STORING LP AND OXYGEN GAS CYLINDERS								
MODEL NO.	TEST LAB APPROVAL	DESCRIPTION	CAPACITIES	EXTERIOR DIMENSIONS APPROX. (H X W X D) IN.	SHIPPING WEIGHT APPROX. (LBS.)				
LP4	*	4 CYL. VERTICAL STANDARD DOOR	4/20, 33 OR 43 LB. CYLINDERS	33 X 30 X 32	76				
LP6	*	6 CYL. VERTICAL STANDARD DOOR	6/20, 33 OR 43 LB. CYLINDERS	33 X 43 X 32	87				
LP8	*	8 CYL. VERTICAL STANDARD DOOR	8/20, 33 OR 43 LB. CYLINDERS	65 X 30 X 32	117				
LP12	*	12 CYL. VERTICAL STANDARD 2-DOOR	12/20, 33 OR 43 LB. CYLINDERS	65 X 43 X 32	126				
LP16	*	16 CYL. VERTICAL STANDARD 2-DOOR	16/20, 33 OR 43 LB. CYLINDERS	65 X 60 X 32	204				
0G10	*	5-10 CYL. VERTICAL STANDARD DOOR	OXYGEN, GAS CYLINDERS	65 X 33 X 32	93				
0G20	*	10-20 CYL. VERTICAL STANDARD 2-DOOR	OXYGEN, GAS CYLINDERS	56 X 66 X 32	177				
ALL WELDI	ed, heavy gauge a	LUMINUM CONSTRUCTION		65 X 60 X 32					

*Meets OSHA Subpart 1910.110 requirements and NFPA 58-113 standards or Canadian Standards Association CSA B149.2.

SECURALL[®] Cabinet Accessories

MODEL # S1





SHIPPING WT

MODEL # P2

F RESISTANT)



CABINE	ET ACCESSORIES	
MODEL No.	DESCRIPTION (@ CORROSIVE RESISTANT)	SHIPPING WT. Approx. (LBS)
WP1	OUTDOOR WEATHERPROOF PACKAGE (FACTORY INSTALLED)	VARIES
SC	SHELF CLIP	1
P1	Extra Poly Liner Tray (for Cabinets 35" wide) @	4
P2	Extra Poly Liner Tray (for Cabinets 43" wide) @	3
P3	Extra Poly Liner Tray (for Cabinets 34" wide) @	3
EXM200	EXPLOSION PROOF EXHAUST BLOWER & MOTOR 1/3 H.P.	50
FGH200	GALVANIZED FLEXIBLE HOSE ASSEMBLY FOR EXHAUST BLOWER	21
DC6	DRUM CRADLE (FOR HORIZONTAL DRUM CABINET)	50
IGW1	INSULATING GROUNDING WIRE ONLY	1
IGW3	INSULATING GROUNDING WIRE WITH ONE CLIP	1
IGW5	INSULATING GROUNDING WIRE WITH TWO CLIPS	1
IGW7	INSULATING GROUNDING WIRE WITH C CLAMP AND CLIP	1
BAW2	FLEXIBLE BONDING WIRE ONLY	1
BAW4	FLEXIBLE BONDING WIRE WITH ONE CLIP	1
BAW6	FLEXIBLE BONDING WIRE WITH TWO CLIPS	1
BAW8	FLEXIBLE BONDING WIRE WITH C CLAMP AND CLIP	1
BR24	DRUM CABINET RAMP	30

CABIN	ET ACCESSORIES
MODEL	DESCRIPTION (@ CORROSIN

NO.	DESCRIPTION (& CONNUSIVE RESISTANT)	APPROX. (LBS.)
S1	EXTRA SHELF (FOR CABINETS 24" WIDE)	5
S15	EXTRA SHELF (FOR 30 GAL. CABINETS 36" WIDE)	13
S2	EXTRA SHELF (FOR CABINETS 43" WIDE)	12
	EXCEPT FOR 90 GAL.	
S3	EXTRA SHELF (FOR CABINETS 34" WIDE)	17
S4	EXTRA SHELF (FOR 90 GAL. CABINETS)	21
S5	EXTRA SHELF (FOR CABINETS 59" WIDE)	16
	EXCEPT FOR LAB CABINETS	
S9	EXTRA SHELF (FOR CABINETS 34" WIDE) W/ROLLER BOTTOM	7
C1	EXTRA SHELF (FOR CABINETS 35" WIDE) @	7
C2	EXTRA SHELF (FOR CABINETS 43" WIDE) @	7
C3	EXTRA SHELF (FOR CABINETS 34" WIDE) @	9
LS5	EXTRA SHELF (FOR LAB CABINETS 35" WIDE)	12
LS10	EXTRA SHELF (FOR LAB CABINETS 47" WIDE)	16
LS15	EXTRA SHELF (FOR LAB CABINETS 59" WIDE)	22
WMS5	EXTRA SHELF (FOR WALL MOUNTED CABINET WMA124)	8
H7	EXTRA SHELF FOR HIGH SECURITY CABINET	9

SECURALL[®] Weather Proof Flammable Storage Cabinets

FEATURES

The double walled FM Approved Cabinets are built with 18 gauge galvannealed steel and painted with a weatherresistant, urethane finish that is also resistant to UV rays.

All models feature a sloped roof with a 2 3/4" overhang for and interior & exterior astragals that prevent rain and snow penetration, while the flush mounted stainless steel locking paddle handle resists corrosion.

Easily move these cabinets to the appropriate work location using built-in heavy gauge forklift channels, and then secure with fully welded 7 gauge steel bolt-down brackets.

Available in 30, 45, 60 & 90 gallon capacities with manual and self-closing door styles. Self-closing Safe-T-Doors have fusible links that melt at 165°F allowing the doors to automatically close and latch. Standard color is Yellow.

Cabinets meet NFPA 40 CFR 264, 265, NFPA Code 30 & OSHA 1910 requirements.



SECURALL[®] Weatherproof cabinets offer the same dependable storage for flammables and combustibles as our standard safety cabinet line with added protection from the elements.



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS



A130WP1

CABINETS FOR STORING FLAMMABLES OUTDOORS									
MODEL No.	DESCRIPTION	NO. OF Shelves	EXTERIOR DIM. (H" x W" x D")	APPROX. Ship WT (LBS)	addtn'l Shelf	APPROX. Ship WT. (LBS)			
A130WP1	30 GAL. WEATHERPROOF, MANUAL 2-DOOR	1	48 X 43 X 18	282	S2-05	12			
A330WP1	30 GAL. WEATHERPROOF, SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	1	50 X 43 X 18	302	S2-05	12			
A145WP1	45 GAL. WEATHERPROOF, MANUAL 2-DOOR	2	69 X 43 X 18	372	S2-05	12			
A345WP1	45 GAL. WEATHERPROOF, SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	2	71 X 43 X 18	392	S2-05	12			
A160WP1	60 GAL. WEATHERPROOF, MANUAL 2-DOOR	2	69 X 31 X 31	423	S3-05	12			
A360WP1	60 GAL. WEATHERPROOF, SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	2	71 X 31 X 31	445	S3-05	12			
A190WP1	90 GAL. WEATHERPROOF, MANUAL 2-DOOR	2	69 X 43 X 31	503	S4-05	12			
A390WP1	90 GAL. WEATHERPROOF, SELF-CLOSE, SELF-LATCH SAFE-T-DOOR	2	71 X 43 X 31	532	S4-05	12			
881	HIGH SECURITY HANDLE WITH HASP			2					

SECURALL[®] Steel Containment Platforms

FEATURES

- 12 Gauge galvannealed steel design
- All-welded construction

Complies with EPA Spill Containment Requirements (40CFR264.175)

Corrosive/ultraviolet resistant acrylic urethane


11,000 lb. load capacity handles any application

Choose from 5 configurations

1" removable galvanized steel floor planking

Forklift channels for easy mobility

Use indoors and outdoors







12 DRUMS



DRUM SPILLSTATIONS

	EEGININGING				
MODEL No.	DESCRIPTION	LOAD Capacity	EXTERIOR DIM. (H" x W" x D")	APPROX. Ship wt (LBS)	SUMP Capacity (gal.)
DSS02	2 DRUM SPILL STATION W/ BUILT-IN SUMP	2,500 LBS	9 X 27 X 56	289	39
DSS04	4 DRUM SPILL STATION W/ BUILT-IN SUMP	5,000 LBS	9 X 51 X 56	430	74
DSS06	6 DRUM SPILL STATION W/ BUILT-IN SUMP	6,600 LBS	9 X 75 X 56	516	109
DSS09	9 DRUM SPILL STATION W/ BUILT-IN SUMP	9,900 LBS	9 X 75 X 80	809	156
DSS12	12 DRUM SPILL STATION W/ BUILT-IN SUMP	11,520 LBS	9 X 75 X 103	1007	201
DSSR60	DRUM SPILL STATION RAMP	1,000 LBS	9 X 24 X 72	113	



herbertwilliams

SECURALL[®] Medical Gas Storage Cabinets

FEATURES

Reinforced all welded construction
Large warning label
Flush mounted locking handle
Heavy gauge piano hinges
Adjustable leveling legs (4)
Double wall construction with 1 1/2 air space
3 point self-latching doors
Urethane finish in OSHA Safety Green

Cabinets are designed to meet storage requirements set forth in: NFPA Code 99 - Health Care Facilities NFPA Code 101 - Life Safety NFPA Code 30 - Flammable & Combustable Liquids



Store your portable medical gas cylinders safely and in compliance with OSHA requirements. These lockable storage cabinets limit access to authorized personnel, protecting cylinders from theft, damage or tampering. The heavy-gauge, double walled construction shields your cylinders from heat, sparks and flame, and separates them from flammable and combustible materials. Designed for Dand E-size cylinders up to 33-3/4" long x 4-1/4" diameter and H-size

cylinders up to 60" long x 9-1/4" diameter. Fire lining available.









MG106H

MG304

MODEL	PRODUCT DESCRIPTION	CYLINDER TYPE	DIA "	HxWxD	WEIGHT (lbs)
MG102	SELF-LATCH STANDARD DOOR	D,E	4 1/4	44 X 14 X 9	97
MG102FL	SELF-LATCH STANDARD DOOR, FIRE-LINED	D,E	4 1/4	44 X 14 X 9	112
MG104	SELF-LATCH STANDARD DOOR	D,E	4 1/4	44 X 14 X 13	115
MG104FL	SELF-LATCH STANDARD DOOR, FIRE-LINED	D,E	4 1/4	44 X 14 X 13	135
MG304	SELF-LATCH SELF-CLOSE SAFE-T-DOOR	D,E	4 1/4	46 X 14 X 13	125
MG304FL	SELF-LATCH SELF-CLOSE SAFE-T-DOOR, FIRE-LINED	D,E	4 1/4	46 X 14 X 13	145
MG109	SELF-LATCH STANDARD DOOR	D,E	4 1/4	44 X 23 X 18	170
MG109FL	SELF-LATCH STANDARD DOOR, FIRE-LINED	D,E	4 1/4	44 X 23 X 18	199
MG309	SELF-LATCH SELF-CLOSE SAFE-T-DOOR	D,E	4 1/4	46 X 23 X 18	180
MG309FL	SELF-LATCH SELF-CLOSE SAFE-T-DOOR, FIRE-LINED	D,E	4 1/4	46 X 23 X 18	209
MG309TL	SELF-LATCH SELF-CLOSE SAFE-T-DOOR, TOP-LOAD	D,E	4 1/4	40 X 23 X 18	160
MG309TLFL	SELF-LATCH SELF-CLOSE SAFE-T-DOOR, TOP-LOAD, FIRE-LINED	D,E	4 1/4	40 X 23 X 18	185
MG121	SELF-LATCH STANDARD DOOR	D,E	4 1/4	44 X 43 X 18	265
MG121FL	SELF-LATCH STANDARD DOOR, FIRE-LINED	D,E	4 1/4	44 X 43 X 18	308
MG321	CYL, SELF-LATCH SELF-CLOSE SAFE-T-DOOR	D,E	4 1/4	46 X 43 X 18	280
MG321FL	SELF-LATCH SELF-CLOSE SAFE-T-DOOR, FIRE-LINED	D,E	4 1/4	46 X 43 X 18	323
MG321TL	SELF-LATCH SELF-CLOSE SAFE-T-DOOR, TOP-LOAD	D,E	4 1/4	40 X 43 X 18	259
MG321TLFL	SELF-LATCH SELF-CLOSE SAFE-T-DOOR, TOP-LOAD, FIRE-LINED	D,E	4 1/4	40 X 43 X 18	297
MG106H	SELF-LATCH STANDARD DOOR	Н	9	65 X 34 X 34	372
MG106HFL	SELF-LATCH STANDARD DOOR, FIRE-LINED	Н	9	65 X 34 X 34	436
MG306H	SELF-LATCH SELF-CLOSE SAFE-T-DOOR	Н	9	67 X 34 X 34	394
MG306HFL	SELF-LATCH SELF-CLOSE SAFE-T-DOOR, FIRE-LINED	Н	9	67 X 34 X 34	458
MG109H	SELF-LATCH STANDARD DOOR	Н	9	65 X 43 X 34	443
MG109HFL	SELF-LATCH STANDARD DOOR, FIRE-LINED	Н	9	65 X 43 X 34	520
MG309H	SELF-LATCH SELF-CLOSE SAFE-T-DOOR	Н	9	67 X 43 X 34	473
MG309HFL	SELF-LATCH SELF-CLOSE SAFE-T-DOOR, FIRE-LINED	Н	9	67 X 43 X 34	550
FL = FIRE LINE) with 3/4" gypsum paenl drywall				
TL = TOP LOAD	MODEL WITH SAFETY HYDRAULIC CYLINDER CLOSURE				
CA18-MGREEN	CASTER ASSEMBLY FOR MG CABINETS 18" IN DEPTH (FACTORY INSTALLED)				30
CA34-MGREEN	CASTER ASSEMBLY FOR MG CABINETS 34" IN DEPTH				35

NFPA 704

Warning label for harzard rating system with placard

holder and protective sheild

(FM, OSHA, NFPA)

Removable galvanized steel

safety floor planking

(250lb FM Requirement,

OSHA 1910, IBC)

Leak-tight, continuously

welded sump meets EPA and

OSHA requirements for

secondary containment

(EPA, NFPA, OSHA, FM, IBC)

SHIPPING WEIGHT

APPROX. (LBS.)

1,352

1.649

2,051

2.590

3.224

4,751

5,913

7,400

9,761

12,629

14,201

SECURALL[®] Drum Safety Storage Buildings

FEATURES

Chemical/corrosive/ultraviolet resistant epoxy paint

Leak tight sump

Natural convection ventilation

Explosion relief panels standard

Removable galvanized steel grating

Reflective warning tape

Forklift channels

Non-sparking aluminum door sill

Specifically designed for outdoor storage and dispensing from 55-gallon drums containing flammable or combustible liquids. Outer wall is constructed of welded 16 or 12 gauge steel. Inner wall is constructed of 18 gauge steel. Outdoor storage buildings are constructed with 3" airspace throughout. Commercial grade lock set handle with inside release.

Call for options: Custom sizes, Fire rating, Shelves, Fire Suppression System, Explosion-Proof Lighting, Heating & Cooling, Ramps, Fiberglass Floor Grating, etc.

Natural Convection Air Vents (OSHA, FM 6049, IBC)

Explosion Relief Panel(s) (IBC, FM, NFPA)

Static Ground Connection Inside and Out (FM, OSHA, NFPA)

Forklift Channels with Anchoring **Brackets** (EPA, to lift off ground & allow for visual inspection of sump area, IBC)

MODEL # B6400

(8'6" X 34' X 8')"

(H X W X D)

EXTERIOR DIMENSIONS

P

SAFETY STORAGE BUILDINGS FOR FLAMMABLES / HAZARDOUS MATERIALS IN DRUMS

OUTDOOR DRUM STG. W/EXPLOSION RELIEF/CLASS I, II LIQUIDS

HAZMAT CHEMICAL STORAGE



CHEMICAL / CORROSIVE / ULTRAVIOLET RESISTANT PAINT

100

CAPACITIES

2/55

4/55

6/55

9/55

12/55

16/55

24/55

32/55

48/55

64/55

80/55

GALLON DRUMS

EXTERIOR DIMENSIONS

APPROX. (H X W X D) IN.

7'1" X 5' X 3'6"

7'1" X 5' X 5'

8'6" X 7' X 5'

8'6" X 7' X 7

8'6" X 7' X 9'

8'6" X 10' X 8'

8'6" X 14' X 8'

8'6" X 18' X 8'

8'6" X 26' X 8'

8'6" X 34' X 8'

8'6" X 42' X 8'

Reflective Warning Tape Marking Entry (OSHA, IBC)

Heavy Guage Aluminum Threshold

Engineered



MODEL

NO.

B200X

B400X

B600X

B900X

B1200X

B1600X

B2400X

B3200X

B4800X

B6400X

B8000X





All models are designed in accordance with the standards set forth by NFPA Code 30 and comply with OSHA and EPA regulations

All models are FM Approved for the storing and dispensing of flammable and combustible liquids.

> Available with 2 or 4 Hour Fire Rating

Meets Canadian Electrical **Standards**

Building priced lower without explosion relief panel

TEST LAB DESCRIPTION

APPROVAL

FM*+

FM*†

SECURALL Agri-Chemical Storage Buildings

FEATURES

High Security Lock

Fiberglass insulated walls, Fluorescent interior lights

Chemical/corrosive/ultraviolet resistant epoxy

Optional leak tight steel shelves

GFCI protected electrical wiring

Forklift Channels

Cardholder & NFR warning label

Many options available

HERBERT WILLIAMS offers a complete line of buildings for storing agri-chemicals safely All buildings are designed to help keep you in accordance with safety rules when mixing and handling pesticides.

HERBERT WILLIAMS products will help to protect you from chemical spills, children and animal poisoning, theft, fire and unauthorized personnel Meets or exceeds EPA regulations.

Agri-Chemical Lockers/Buildings are also available with 2 and 4-hour fire ratings. Firerating is dependant on the proximity of the location of your outdoor storage Locker/Building to any adjacent building or property line. Storage Units located within 10 feet of a main building or property line require a 4-hour fire rating. Units located more than 10 feet and less than 50 feet from a main building or property line require a 2-hour fire rating. Units located more than 75 feet from a

main building or property line require do not require a fire rating (Check with your local authority having jurisdiction).

Natural Convection Air Vents (OSHA, FM 6049, IBC)

R11 Fiberglass Insulation in Ceiling and Walls (IBC)

Vapour-resistant Exterior Light with Photocell (UL, OSHA, IBC)

Forklift Channels with **Anchoring Brackets** (EPA, to lift off ground & allow for visual inspection of sump area, IBC)



PESTICIDE AND AGRI-CHEMICAL STORAGE

CHEMICAL / CORROSIVE / ULTRAVIOLET RESISTANT PAINT

Reflective Warning Tape Marking Entry

(OSHA 1910, IBC)


Dust-proof. Fluorescent Interior Light with Weatherproof Switch (UL. OSHA, IBC)

Removable galvanized steel safety floor planking (250lb FM Requirement, **OSHA 1910, IBC)**

Leak-tight, continuously welded sump meets EPA and **OSHA** requirements for secondary containment (EPA, NFPA, OSHA, FM, IBC)

Heavy Guage Aluminum Threshold (IBC)





RAMPS ARE COMPATABLE WITH BOTH HAZARDOUS CHEMICAL AND AGRI-CHEMICAL STORAGE LOCKERS AND BUILDINGS.

OSHA



Gold CTORY MUTUAL APPROVAL

SMART

certified

AG-CUSTOM

Design your own building with your sizes and options up to 42 feet wide.

Call for more information including pricing

	UILDINGS FOR	R STORING AGRI-	CHEMICAL MATERIALS	
--	--------------	-----------------	--------------------	--

MODEL # AG1600

(H X W X D)

(8'6" X 10' X 8')


MODEL No.	TEST LAB Approval	DESCRIPTION	CAPACITIES CUBIC FEET	EXTERIOR DIMENSIONS Approx. (H X W X D) IN.	Shipping Weight Approx. (LBS.)
AG200	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	68.4	7'1" X 5' X 3'6"	1,499
AG400	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	145.1	7'1" X 5' X 5'	1,891
AG600	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	211.4	8'6" X 7' X 5'	2,331
AG900	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	308.1	8'6" X 7' X 7'	2,937
AG1200	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	404.7	8'6" X 7' X 9'	3,638
AG1600	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	524.1	8'6" X 10' X 8'	5,226
AG2400	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	747.7	8'6" X 14' X 8'	6,443
AG3200	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	971.3	8'6" X 18' X 8'	8,030
AG4800	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	1418.5	8'6" X 26' X 8'	10,566
AG6400	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	1865.7	8'6" X 34' X 8'	13,584
AG8000	FM*†	OUTDOOR STORAGE FOR AGRI-CHEMICAL MATERIAL	2313.0	8'6" X 42' X 8'	15,301

SECURALL[®] Customized Buildings

Our Sales and Engineering teams are ready to help you design a storage building for your special application.

While our standard models are designed for chemical storage, pesticide storage, and hazardous material storage, custom models can be designed for any purpose.

Our decades of fabrication experience enables us to construct the highest quality storage building for just about any storage need. So don't hesitate to ask; we can probably build it!





SECURALL[°] **Custom and Stainless Steel Cabinet Models**

FEATURES

Cabinets can be constructed to comply with both NFPA and OSHA regulations

Cabinets can be made in almost any size or shape; example: To fit under hoods, on top of counters, free standing or wall mounted

Select your optional equipment: doors, shelves, color or wording, kick recess and vents

Cabinets can be made for the storage of flammables, acids, oxidizers, water reactive chemicals, hazardous waste, poisons etc.

SECURALL also offers low contaminant stainless steel cabinets for storage in controlled environment applications


Constructed of 18 gauge 304 brushed stainless steel



herbertwilliams



Industry-Leading Safety Cabinets

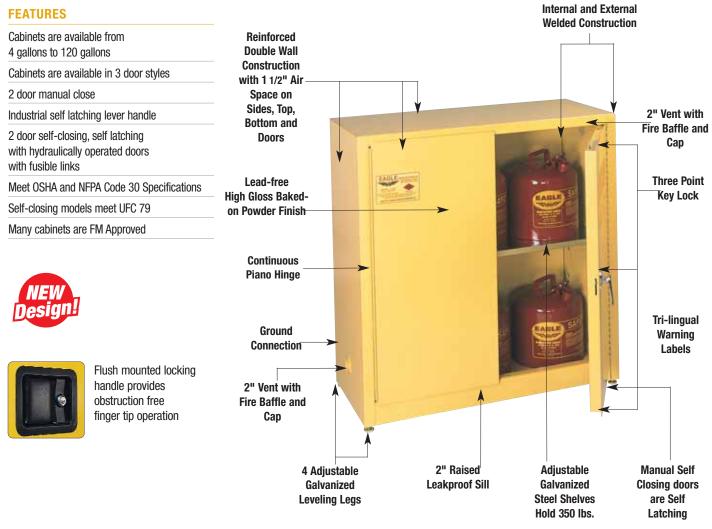

Eagle cabinets are available in the following colors:



DOOR STYLES



SLIDING DOOR MODEL # 1945 30 AND 45 GALLON ONLY



FEATURES

NEW! All models now include self-latching doors

Compact Storage Cabinets

Available in 4, 12, 15 and 16 gallon

Single door manual or self closing

Ideal for the storage of smaller containers of flammables, can be used on counter tops, workbenches or on the floor

Standard Storage Cabinets

Available in two-door manual or self-closing

Designed for storage of larger containers of flammable liquids.

Galvanized steel shelves, adjustable on 43/4" centers, support 350 pounds

Galvanized steel leveling legs

Internal and external welded construction

18 Gauge steel reinforced double wall panel construction with 11/2" air space

2" Raised leakproof sill

2" Vent with fire baffle and cap

Ground connection

Lead-free high gloss baked on powder finish

3 Point key lock doors

Compliance: OSHA 29; CFR 1910.106(d)3



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS



MODEL # 1947 45 GALLON STANDARD: 2 SHELVES EXTERIOR DIMENSIONS (W X D X H) (43 X 18 X 65)"

MODEL # 1903



MODEL # 1924 12 GALLON EXTERIOR DIMENSIONS (W X D X H) (23 X 18 X 35)"

MODEL # 1992 90 GALLON, STANDARD: 2 SHELVES EXTERIOR DIMENSIONS (W X D X H) (43 X 34 X 65)"





MODEL #	MODEL #				MAXIMUM	SLIDING
MANUAL	SELF-CLOSING	DESCRIPTION	#SHELVES	WXDXH	WEIGHT	SELF-CLOSING
1904	1903	4 GALLON	1	17 1/2" X 18" X 22 1/2"	70 LBS.	-
1925	1924	12 GALLON	1	23" X 18" X 35"	135 LBS.	-
ADD 15	ADD 14	15GALLON	OPTIONAL	43" X 18" X 22 1/4"	145 LBS.	-
1906	1905	16 GALLON	1	23" X 18" X 44"	150 LBS.	-
1971	1970	22 GALLON	1	35" X 22" X 35"	215 LBS.	-
1976	1975	24 GALLON	3	43" X 12" X 44"	235 LBS.	-
1923	2310	24 GALLON	3	23" X 18" X 65"	270 LBS.	-
1932*	3010*	30 GALLON	1	43" X 18" X 44"	257 LBS.	1930*
1947*	4510*	45 GALLON	2	43" X 18" X 65"	353 LBS.	1945*
1946*	4610*	48 GALLON	3	23" X 34" X 65"	370 LBS.	-
1962*	6010*	60 GALLON	2	31 1/4" X 31 1/4" X 65"	364 LBS.	-
1992*	9010*	90 GALLON	2	43" X 34" X 65"	485 LBS.	-



Tower Cabinets

FEATURES

Designed with 4" adjustable legs for easy balance and level

Can be placed over HVAC floor or baseboard vents

Easy cleaning under the cabinet

Can be placed on uneven floor

or over wires and plumbing

Increase ventilation to reduce possible corrosion

Meet OSHA, NFPA Code 30 and FM approval

Compliance: OSHA 29 CFR 1910.106(d)3



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS



MODEL # 1932LEGS 30 GALLON

EXTERIOR DIMENSIONS

(W X D X H)



MODEL # 1947LEGS 45 GALLON EXTERIOR DIMENSIONS (W X D X H) (43 X 18 X 69)"

MODEL					SLIDING	MAXIMUM
#	SELF CLOSING	DESCRIPTION	#SHELVES	WXDXH	SELF-CLOSING	WEIGHT
1906LEGS	-	16 GALLON	1	23" X 18" X 48"	-	160 LBS.
1932LEGS*	-	30 GALLON	1	43" X 18" X 48"	-	257 LBS.
1947LEGS*	-	45 GALLON	2	43" X 18" X 69"	-	352 LBS.
1962LEGS*	-	60 GALLON	2	31 1/4" X 31 1/4" X 69"	-	364 LBS.
1992LEGS*	-	90 GALLON	2	43" X 34" X 69"	-	490 LBS.



Heavy Duty Office Supply Cabinets

FEATURES

Heavy duty cabinets

Safe storage for backup documents and office supplies from theft and fire

Double wall 18 gauge steel

4 Painted shelves

3 Point security lock



MODEL # 1947-4BEI 45 GALLON EXTERIOR DIMENSIONS (W X D X H) (43 X 18 X 65)"



DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS

MODEL					SLIDING	MAXIMUM
#	SELF-CLOSING	DESCRIPTION	#SHELVES	WXDXH	SELF CLOSING	WEIGHT
1947-4BEI*	-	45 GALLON	4	43" X 18" X 65"	-	371 LBS.
1947-4GRAY*	-	45 GALLON	14	43" X 18" X 65"	-	371 LBS.



Paint and Ink Cabinets

FEATURES

Available in red or yellow

Recommended for print shops and auto paint and body shops for safely and securely storing and organizing paint and ink cans

Available in red and yellow with additional shelves to maximize storage space

Sizes all based on the number of one gallon paint containers they will hold

Galvanized steel shelves, adjustable on 4 3/4" centers, support 350 pounds

Galvanized steel leveling legs

Internal and external welded construction

18 Gauge steel double wall panel construction with 1 1/2" air space

2" raised leakproof sill

2" vents with fire baffles and caps

Ground connection

Compliance: OSHA 29 CFR 1910.106(d)3

MODEL # PI-47 60 GALLON EXTERIOR DIMENSIONS (W X D X H) (43 X 18 X 65)"

MABLE



MODEL # YPI-62 96 GALLON EXTERIOR DIMENSIONS (W X D X H) (31 1/4 X 31 1/4 X 65)"



YELLOW - PAINT AND INK AVAILABLE IN YELLOW OR RED

MODEL # PI-32 40 GALLON EXTERIOR DIMENSIONS (W X D X H) (43 X 18 X 44)"

FLAMMABLE KEEP FIRE AWA \sim

DESCRIPTION	WXDXH	SLIDING	MANUAL Close	SELF-CLOSING	#SHELVES	SHELF Depth	MAXIMUM WEIGHT
30 GALLON	43" X 12" X 65"	-	YPI-77	YPI-7710	5	8 3/4"	320 LBS.
40 GALLON	43" X 18" X 44"	YPI-30*	YPI-32*	YPI-3010*	3	14 3/4"	281 LBS.
60 GALLON	43" X 18" X 65"	YPI-45*	YPI-47*	YPI-4510*	5	14 3/4"	389 LBS.
96 GALLON	31 1/4" X 31 1/4" X 65"	YPI-60*	YPI-62*	YPI-6010*	5	28"	412 LBS.

Note: To order red cabinets remove the "Y" from the part number



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS

MAXIMUM STORAGE QUANTITIES FOR CABINETS							
LIQUID CLASS	MAXIMUM STORAGE CAPACITY						
FLAMMABLE/CLASS I	60 GAL.						
COMBUSTIBLE/CLASS II	60 GAL.						
COMBUSTIBLE/CLASS III	120 GAL.						
COMBINATION OF CLASSES	120 GAL.*						

* Not more than 60 gallons may be Class I and Class II liquids. No more than120 gallons of Class III liquids may be stored in a storage cabinet, according to OSHA 29 CFR 1910.106(d)(3) and NFPA 30 Section 4-3-1

Note: Not more than three such cabinets may be located in a single fire area, according to NFPA 30 Section 4-3-1.

Provide adequate facilities for the storage of flammables, corrosives, pesticides or paint and ink products. Compliance: OSHA 29CFR 1910.106(d)3



u herbertwilliams



Acid and Corrosive Cabinets

FEATURES

Special corrosive resistant powder finish on all internal and external surfaces, including shelves for longer cabinet life

Standard polyethylene trays fit over shelves and in the cabinet bottom, containing small spills and providing extra corrosion protection

All cabinets feature baked on powder coat finish

Not recommended for use with Sulfuric, Nitric or Hydrochloric Acid. (The Eagle Polyethylene cabinets are suitable for use with these acids) MODEL # CRA-32 30 GALLON EXTERIOR DIMENSIONS (H X W X D) (43 X 18 X 44)" MODEL # CRA-47 45 GALLON EXTERIOR DIMENSIONS (H X W X D) (43 X 18 X 65)"

CORROSIVES





* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS

LUE ACID CORROSIVE CABINETS

			MANUAL			SHELF	MAXIMUM
DESCRIPTION	WXDXH	SLIDING	CLOSE	SELF-CLOSING	#SHELVES	DEPTH	WEIGHT
4 GALLON	17 1/2" X 18" X 22 1/2"	-	CRA-1904	CRA-1903	1	14 3/4"	80 LBS.
12 GALLON	23" X 18" X 35"	-	CRA-1925	CRA-1924	1	14 3/4"	135 LBS.
15 GALLON	43" X 18" X 22 1/4"	-	ADD-CRA	ADD-CRA-14	OPTIONAL	14 3/4"	148 LBS.
16 GALLON	23" X 18" X 44"	-	CRA-1906	CRA-1905	1	14 3/4"	150 LBS.
22 GALLON	35" X 22" X 35"	-	CRA-71**	CRA-70**	1	18 3/4"	215 LBS.
24 GALLON	23" X 18" X 65"	-	CRA-23	CRA-2310	3	14 3/4"	270 LBS.
30 GALLON	43" X 18" X 44"	CRA-30*	CRA-32*	CRA-3010*	1	14 3/4"	257 LBS.
45 GALLON	43" X 18" X 65"	CRA-45*	CRA-47*	CRA-4510*	2	14 3/4"	353 LBS.
60 GALLON	31 1/4" X 31 1/4" X 65"	CRA-60*	CRA-62*	CRA-6010*	2	28"	364 LBS.



Polyethylene Acid Cabinets

FEATURES

Suitable for use with sulphuric, hydrochloric and nitric acid

100% polyethylene for excellent resistance to harmful acid vapors and spills

Available in 4 gallon Benchtop, 22 gallon Under-Counter Storage and 44 gallon Cabinet with independent upper and lower compartments, allowing segregation of reactive chemicals

All cabinets feature internal sump capacities of at least 1 gallon

Adjustable poly shelves

Storage for smaller containers in the doors

Lockable doors

2-2" poly vents with caps

Available in Flat Blue and White with a smooth finish for ease of cleaning



DESCRIPTION	WXDXH	BLUE	WHITE	#SHELVES	DEPTH	WEIGHT
4 GALLON	18" X 18" X 22"	CRA-P04	CRA-P04W	1	12"	35 LBS.
22 GALLON	35" X 22" X 36"	CRA-P22**	CRA-P22W**	2	12"	95 LBS.
44 GALLON	35" X 22" X 65"	CRA-P44**	CRA-P44W**	4	12"	130 LBS.



Cabinets for the Storage of Hazardous and Flammable Drums

FEATURES

Choice of horizontal or vertical drum storage

Available for either one or two drums

Convenient half shelf for additional storage space (for accessories or containers)

Drum supports

Large Flammable - Keep Fire Away Labels

Hazardous Cabinets come with Hazardous Waste labels

Options

Drum rollers and drum cabinet ramp for easy drum handling

MODEL # 1928 55 GALLON EXTERIOR DIMENSIONS (W X D X H) (31 1/4 X 48 1/4 X 50)"

OPTIONAL: DOLLY - MODEL #1918

CABINETS FOR THE STORAGE OF HAZARDOUS AND FLAMMABLE DRUMS



MODEL # 1955

110 GALLON EXTERIOR DIMENSIONS

(W X D X H)



INCLUDED: 2 ROLLERS - MODEL #1920



DESCRIPTION	WXDXH	SLIDING	MANUAL Close	SELF-CLOSING	SHELVES #	SHELF Depth	MAXIMUM WEIGHT
55 GALLON	31 1/4" X 31 1/4" X 65"	-	1926*	2610*	1	14 3/4"	350 LBS.
55 GALLON	31 1/4" X 48 1/4" X 50"	-	1928	2810	-	-	400 LBS.
110 GALLON	58" X 31 1/2" X 65"	-	1955*	5510*	1	14 3/4"	575 LBS.
55 GALLON	31 1/4" X 31 1/4" X 65"	-	HAZ1926*	HAZ2610*	1	14 3/4"	350 LBS.
110 GALLON	58" X 31 1/2" X 65"	-	HAZ1955*	HAZ5510*	1	14 3/4"	575 LBS.
60 GALLON	43" X 34" X 65"	-	HAZ1992*	HAZ9010*	1	14 3/4"	525 LBS.
* COMES STAN	DARD WITH ROLLER KIT						
ACCESSORIES							
MODEL NO.	DESCRIPTION			WXDXH		MAXIMUM	WEIGHT
1918	DOLLY FOR 1928			-	:	31 LBS.	
1920	2" ROLLERS			24" X 24" X 2"	Į	50 LBS.	
1957	DRUM CABINET RAN	IP 1000LB.		231/4" x 261/4" x 41	/4"	28 LBS.	
1994	ROLLER KIT FOR #HA	Z1992 AND	#HAZ9010	20" X 30" X 2"		45 LBS.	

COMPLIANCE

Not more than 60 gallons may be Class I and Class II liquids.

OSHA 29 CFR 1910.106(d)(3) and NFPA 30 Section 4-3.1



MODEL # 1957 RAMP 1,000 LB. CAPACITY EXTERIOR DIMENSIONS (H X W X D) (23 1/4 X 26 1/4 X 4 1/4)" MODEL # HAZ1926 55 GALLON EXTERIOR DIMENSIONS (W X D X H) (31 1/4 X 31 1/4 X 65)"







Pesticide Cabinets

FEATURES

Provide needed protection for companies who specialize in lawn care, golf course management, agricultural interests or who handle and store pesticides and poisons

Galvanized steel shelves, adjustable on 4 3/4" centers, support 350 pounds

Galvanized steel leveling legs

Internal and external welded construction

18-gauge steel double wall panel construction with 11/2" air space

2" raised leakproof sill

2" vent with fire baffle and cap

Ground connection

Lead-free high gloss baked on powder finish

3 point key lock doors

Large Flammable Keep Fire Away and PESTICIDES label.











* FACTORY MUTUAL APPROVA DESIGNED IN ACCORDANCE WI NFPA AND OSHA STANDARDS

	PESTICIDE CABI	NETS						
	DESCRIPTION	W X D X H	SLIDING	MANUAL Close	SELF-CLOSING	#SHELVES	SHELF DEPTH	MAXIMUM WEIGHT
	12 GALLON	23" X 18" X 35"		PEST 25	PEST 24	1	14 3/4"	135 LBS.
	30 GALLON	43" X 18" X 44"	-	PEST 32*	PEST 3010*	1	14 3/4"	259 LBS.
	45 GALLON	43" X 18" X 65"		PEST 47*	PEST 4510*	2	14 3/4"	351 LBS.
AL ITH	55 GALLON	31 1/4" X 31 1/4" X 65"		PEST 26*	PEST 2610*	1	14 3/4"	350 LBS.
S	60 GALLON	31 1/4" X 31 1/4" X 65"	-	PEST 62*	PEST 6010*	2	28"	363 LBS.
	110 GALLON	58" X 31 1/2" X 65"	-	EST 1955	PEST 5510	1	14 3/4"	575 LBS.
	TTU GALLUN	58 X 31 1/2 X 65	-	EST 1955	PEST 5510		14 3/4	575 LBS.



Poly Pesticide Cabinets

FEATURES

Constructed of 100% polyethylene for excellent resistance to harmful vapors and spills

Available in 4 gallon Benchtop and 22 gallon

Internal and top sump capacities of at least 1 gallon

Adjustable poly shelves

Storage for smaller containers in the doors

Lockable doors

2-2" poly vents with caps

Available in Flat Green in a smooth finish for ease of cleaning

MODEL #PEST-P04 4GALLON EXTERIOR DIMENSIONS (W X D X H) (18 X 18 X 22)"





MODEL # PEST-P22 22 GALLON EXTERIOR DIMENSIONS (W X D X H) (35 X 22 X 36)"

POLY PESTICIDE CABINETS						
MODEL NO.	DESCRIPTION	W X D X H	#SHELVES	DEPTH	WEIGHT	
PEST-P04	4 GALLON	18" X 18" X 22"	1	12"	35 LBS.	
PEST-P22	22 GALLON	35" X 22" X 36"	2	12"	95 LBS.	



Cabinet Accessories, Shelves & Parts



MODEL # 1950/1951 BONDING WIRES (3') MODEL #1953 BRASS HORIZONTAL DRUM VENT MODEL #1974B BRASS FAUCET



MODEL # 1910G SELF CLOSING ADAPTOR KIT



MODEL # 1934/35 CABINET DOLLY CARTS



MODEL # 1934 WITH 1925 CABINET DOLLY CARTS



1916G SHELF DIVIDERS



MODEL #1918 HORIZONTAL DRUM CRADLE

C-89-2

MODEL NO.	DESCRIPTION
1902	Metal shelf for 4 Gallon Cabinets
1908G	3" DIVIDER FOR 60 GALLON CABINETS
1909G	5" DIVIDER FOR 60 GALLON CABINETS
1910G	SELF CLOSING ADAPTOR KIT FOR 15, 30, 45 GALLON CABINETS
1911	METAL SHELF FOR 60 GALLON CABINETS
1912G	SELF CLOSING KIT FOR ALL SINGLE DOOR 4, 12, 16 AND 24 GAL. CABINETS
1915	METAL SHELF FOR 15, 30 & 45 GALLON CABINETS
1916G	3" DIVIDER FOR 4, 12, 15, 16, 30, 45 GAL. CABINETS
1917G	5" DIVIDER FOR 4, 12, 15, 16, 30, 45 GAL. CABINETS
1918	CRADLE FOR HORIZONTAL DRUM CABINETS
1919	METAL SHELF FOR 12, 16 & 24 GALLON CABINETS
1920	ROLLER CONVEYOR
1921	METAL SHELF FOR HAZ1926 & HAZ2610
1922	METAL SHELF FOR HAZ 1955
1934	CABINET DOLLY CART FOR 12 & 16 GALLON CABINETS
1935	CABINET DOLLY CART FOR 15 & 30 GALLON CABINETS
1950	GROUNDING WIRE W/ALLIGATOR CLIPS 36" LENGTH
1951	BONDING WIRE W/C CLIP 36" LENGTH
1953	BRASS HORIZONTAL DRUM VENT
1957	DRUM CABINET RAMP
1966G	SELF CLOSING ADAPTOR KIT FOR 60 GALLON FLAMMABLE, PI 60 SERIES & VERTICAL ONE DRUM CABINET
1967G	SELF CLOSING ADAPTOR KIT FOR 2 DRUM CABINET
1972	METAL SHELF FOR UNDER COUNTER CABINETS
1977	METAL SHELF FOR WALL MOUNT CABINETS
1978G	SELF CLOSING ADAPTOR KIT FOR UNDER COUNTER CABINET
1979G	SELF CLOSING ADAPTOR KIT FOR WALL MOUNT & 90 GALLON CABINETS
CRA-1901	POLY TRAY FOR 4 GALLON CABINETS
CRA-1902	COATED METAL SHELF FOR 4 GALLON CABINETS
CRA-1907	POLY BOTTOM TRAY FOR 12, 16 & 24 GALLON CABINETS
CRA-1908	POLY SHELF TRAY FOR 12, 16 & 24 GALLON CABINETS
CRA-1909	COATED METAL SHELF FOR 12, 16 & 24 GALLON CABINETS
CRA-1912	POLY BOTTOM TRAY FOR 15, 30 & 45 GALLON CABINETS
CRA-1913	POLY SELF TRAY FOR 15, 30 & 45 GALLON CABINETS
CRA-1914	COATED METAL SHELF FOR 15, 30 & 45 GALLON CABINETS
CRA-1916	POLY BOTTOM TRAY FOR 60 GALLON CABINETS
CRA-1917	POLY SHELF TRAY FOR 60 GALLON CABINETS
CRA-1918	COATED METAL SHELF FOR 60 GALLON CABINETS
CRA-72	COATED METAL SHELF FOR CRA-70 & CRA-71
CRA-PS04	POLY CABINET SHELF FOR 4 GALLON POLY CABINET
CRA-PS22	POLY CABINET SHELF FOR 22 & 44 GALLON POLY CABINETS
3045	KIT UNIVERSAL POLY TRAY KIT 3 TRAYS
C-80	FUSIBLE LINK ROUND SLIDING DOOR MODELS ONLY
C-80N	FUSIBLE LINK RECTANGULAR SLIDING DOOR MODELS ONLY
C-82N	DOOR LOCK WITH KEYS - ALL MODELS
C-83N	KEY SET (2 KEYS)
C-89-1	DOOR LOCK ASSEMBLY FOR 30 GALLON CABINETS (W/RODS)
0 00 0	

DOOR LOCK ASSEMBLY FOR 45 & 60 GALLON CABINETS (W/RODS)

u herbertwilliams





• herbertwilliams

😈 WB Type I & Type II Safety Cans

FEATURES

Store and Pour Flammables with approved WB Safety Cans

A Safety Can is the approved container for storage and handling of flammable and combustible liquids to satisfy OSHA and NFPA requirements

Roll-seam welded 24 gauge terne steel to pass 25 psi-hydrostatic test

Spring loaded lid relieves internal pressure at 5 psi yet retains full can of liquid when inverted

Every WB can must pass an underwater pressure test before painting and packaging

Flame Arrestor protects the flammable contents of the can from exterior sources of ignition

One-hand grip-to-open pour spouts

Integral pressure-relief on Type 11 pour spouts

Flame Arrestors

Every WB safety can is equipped with a tested and approved flame arrestor

The flame arrestor protects the flammable contents of the can from exterior sources of ignition



LISTED

* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS



MODEL#PPF-8 POLY POINT & POUR FUNNEL <text>

TYPE I - SAFETY STORAGE CANS



TYPE II - FILLING SAFETY CANS

MODEL NO.	DESCRIPTION	PACKED	SHIPPING	WEIGHT
WB100	1 GALLON SAFETY CAN (3.8 LITRES)	6 TO CTN.	32 LBS.	14.5 KG.
WB101	1 IMP. SAFETY CAN (4.6 LITRES)	6 TO CTN.	35	15.9
WB102	2 GALLON SAFETY CAN (7.6 LITRES)	2 TO CTN.	7	3.18
WB103	3 GALLON SAFETY CAN (11.4 LITRES)	1 TO CTN.	8	3.6
WB105	5 GALLON SAFETY CAN (18.9 LITRES)	1 TO CTN.	9	4.0
WB106	5 IMP. SAFETY CAN (22.7 LITRES)	1 TO CTN.	10	4.5
TYPE II – FILL	ING SAFETY CANS – FLEXIBLE SPOUT			
WB200	1 GALLON SAFETY CAN (3.8 LITRES)	6 TO CTN.	38 LBS.	17.2 KG.
WB201	1 IMP. SAFETY CAN (4.6 LITRES)	6 TO CTN.	44	2.0
WB202	2 GALLON SAFETY CAN (7.6 LITRES)	2 TO CTN.	10	4.5
WB203	3 GALLON SAFETY CAN (11.4 LITRES)	1 TO CTN.	10	4.5
WB205	5 GALLON SAFETY CAN (18.9 LITRES)	1 TO CTN.	12	5.4
WB206	5 IMP. SAFETY CAN (22.7 LITRES)	1 TO CTN.	12	5.4
TYPE II – ADD	NITIONAL POUR SPOUTS			
R-3409	5/8" I.D. X 9"	1	.5	

ULC, FM OSHA, NFPA



HDPE & Stainless Type I Polyethylene Safety Cans

Impervious to many liquid chemicals, acids, caustics, solvents and corrosives

Help reduce the danger of explosions

High density polyethylene cans are dent and puncture resistant and feature corrosion resistant stainless steel fittings

Type II Galvanized Steel Safety Cans

Safety cans feature two openings, one with a pressure-relief spring closing lid for filling, one with an actuated pour valve with a flexible metal spout for safer controlled dispensing

Filler spout and flame arrestors in both openings are non-sparking brass designed for flashback protection

Cans are FM, UL and ULC approved and meet OSHA and NFPA Code 30 requirements



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS THE ABOVE CANS ARE AVAILABLE IN BLUE FOR THE STORAGE OF KEROSENE AND YELLOW FOR THE STORAGE OF DIESEL. WHEN ORDERING, ADD A "B" OR "Y" AT THE END OF THE MODEL NUMBER. UL, ULC AND FM APPROVED.

TYPE I SAFETY CANS						
CAPACITY	DIMENSIONS	W/O FUNNEL	W/FUNNEL	WEIGHT		
1 QUART	51⁄4" X 8"	UI-2-S	-	1.96 LBS.		
2 QUARTS	63⁄4" X 83⁄4"	UI-4-S	-	2.59 LBS.		
1 GALLON	9" X 8"	UI-10-S	UI-10-FS	3.52 LBS.		
2 GALLONS	111/4" X 91/2"	UI-20-S	UI-20-FS	5.25 LBS.		
5 GALLONS	121/2" X 131/2"	UI-50-S	UI-50-FS	7.00 LBS.		
TYPE II						
CAPACITY	DIMENSIONS	7/8" SPOUT	5/8" SPOUT	WEIGHT		
2 GALLONS	111/4" X 91/2"	U2-26-S	U2-26-SX5	8 LBS.		
5 GALLONS	121/2" X 131/2"	U2-51-S	U2-51-SX5	10 LBS.		
UL AND FM APPRO	OVED.					
TYPE I STAINLE	SS STEEL CANS					
CAPACITY	DIMENSIONS	MODEL		WEIGHT		
21/2 GALLONS	111/4" X 95/8"	1313		8 LBS.		
5 GALLONS	111/4" X 157/8"	1315		10 LBS.		
FM APPROVED.						
TYPE I POLY LA	B CANS					
CAPACITY	DIMENSIONS	WHITE	RED	WEIGHT		
3 GALLONS	121⁄2" X 13"	1535	1537	6 LBS.		
5 GALLONS	121⁄2" X 17"	1541	1543	7 LBS.		
FM APPROVED.						

• herbertwilliams

MODEL#1301

1 GALLON

MODEL#1417 5 GALLONS

MODEL#1401

1 GALLON



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS

FEATURES

Specialty Safety Cans

FEATURES

Reduce the danger of explosions resulting from the ignition of vapors of flammable liquids

Available in coated metal, stainless steel and high density polyethylene for safe storage and handling of most chemical compounds

Faucet Safety Cans help control dispensing of flammable liquids into small capacity vessels with a variety of drip-free faucet styles

Compliance: OSHA 29CFR 1910.106, 1925.152 and NFPA Code 30



MODEL#1513

1 GALLON



MODEL#1327

5 GALLONS

LAB CANS				
CAPACITY	DIMENSIONS	METAL RED	STAINLESS	WEIGHT
1 GALLON	6" X 8" X 13"	1401	1301	3.75 LBS.
POLYETHYLENE	LAB CANS			
CAPACITY	DIMENSIONS	RED	WHITE	WEIGHT
1/2 GALLON	6" X 81/2" X 91/2"	1510	1512	1.50 LBS.
1 GALLON	6" X 81⁄2" X 13"	1511	1513	2.80 LBS.
FAUCET CANS				
CAPACITY	DIMENSIONS	BRASS	STAINLESS	WEIGHT
5 GALLONS	121/2" X 131/2"	1417*	-	12 LBS.

1327*

9 LBS.

MODEL#1512 1/2 GALLON

Provide an intermediate station for temporary

wide 4" spout and cap that locks open to

High Density Polyethylene Cans

storage of liquid chemical wastes All cans are FM approved and feature

80 degree angle for easy filling All cans have a flame arrestor, a free-swing handle and auto vent cap

Resistant to dents and punctures

Ideal for more aggressive chemicals &

Ideal for disposal of flammable petroleum

Type 316 Stainless Steel cans

Recommended for use with most alcohols,

ethers, aromatics, hydrocarbons and

chlorinated hydrocarbon wastes

Feature stainless steel fittings

Galvanized Steel cans

corrosives

based wastes

Disposal Cans

MODEL#1511 1 GALLON

MODEL#1511 1/2 GALLON

*1417	GALVANIZED;	1327	STAINLESS

111/4" X 157/8"

5 GALLONS



MODEL#1423 2 1/2 GALLONS



* FACTORY MUTUAL APPROVAL DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS

ALL DISPOSAL CANS FEATURE STAINLESS FLAME ARRESTOR UNLESS MARKED.

5 GALLONS

CAPACITY	DIMENSIONS	STAINLESS	GALVANIZED	WEIGH
21/2 GALLONS	111⁄4" X 12"	1323	-	8 LBS.
5 GALLONS	111⁄4" X 18"	1325	-	10 LBS.
21/2 GALLONS	111⁄4" X 12"	-	1423*	8 LBS.
5 GALLONS	121⁄2" X 18"	-	1425*	10 LBS.
CAPACITY	DIMENSIONS	WHITE POLY	RED POLY	WEIGH
3 GALLONS	121/2" X 141/2"	1517	1519	7 LBS.
5 GALLONS	121/2" X 181/2"	1523	1525	8 LBS.





8 QUARTS

B-608

DESIGNED IN ACCORDANCE WITH NFPA AND OSHA STANDARDS

PARTS CLEANIN	PARTS CLEANING BASKET AVAILABLE AS NECESSARY (SHOWN AT RIGHT)						
DOT TRANSP	DOT TRANSPORT CANS						
CAPACITY	DIMENSIONS	7/8" O.D. SPOUT	5/8" O.D. SPOUT	WEIGHT			
5 GALLONS	121⁄2" X 153⁄4"	1215	1215-SX5	13 LBS.			

7"

8.25 LBS.

12"

• herbertwilliams



POLY WASTE	CANS				
RED POLY	YELLOW POLY	CAPACITY	DIMENSIONS	BIO-HAZ	WEIGHT
933-FL	933-FLY	6 GALLONS	161⁄2" X 131⁄2" X 16"	943BI0	9 LBS.
935-FL	935-FLY	10 GALLONS	22" X 18" X 18"	945BI0	14 LBS.
937-FL	937-FLY	14 GALLONS	22" X 18" X 21"	947BI0	16 LBS.





MODEL # 1206BLACK

FEATURES

1208BLACK



DECORATIVE SAFE SMOKERS

SAFESMOKER	M CIGARETTE RECEPTACLE			
MODEL	DESCRIPTION	DIME	NSIONS	WEIGHT
1208BEIGE	SAFESMOKER™-BEIGE	171/4	"DIA. X 431/4"H	10 LBS.
1208BROWN	SAFESMOKER™-BROWN	171/4	"DIA. X 4314"H	10 LBS.
1208BLACK	SAFESMOKER™-BLACK	171/4	"DIA. X 431/4"H	10 LBS.
1208GRAY	SAFESM0KER™-GRAY	171/4	"DIA. X 431/4"H	10 LBS.
1206BEIGE	SAFESM0KER™-BEIGE	151/4	"DIA. X 373⁄4"H	7 LBS.
1206BROWN	SAFESMOKER™-BROWN	151/4	"DIA. X 373⁄4"H	7 LBS.
1206BLACK	SAFESMOKER™-BLACK	151/4	"DIA. X 373⁄4"H	7 LBS.
1206GRAY	SAFESMOKER™-GRAY	151/4	"DIA. X 373⁄4"H	7 LBS.
METAL/POLY B	UTT CANS			
CAPACITY	DIMENSIONS	YELLOW	BEIGE	WEIGHT
2 GALLONS	12" X 35"	1202	1202BEI	5 LBS.
5 GALLONS	12" X 40"	1205	1205BEI	7 LBS.
ORIGINAL BUTT	r can			
CAPACITY	DIMENSIONS	YELLOW	BEIGE	WEIGHT
5 GALLONS	12" X 33"	1200YELLOW	1200BEIGE	7 LBS.

U Fire Resistant Double Walled Security Cabinets

Model BR - Closed storage cabinet to secure materials or valuables (MANUAL CLOSE DOORS)

FEATURES

All welded double wall 18 gauge construction with 1-1/2" insulating air space

Lockable flush handle with 2 sets of keys

Doors are double walled, 14 gauge outside & 18 gauge inside

Doors have 3 point locking system and radius edges

4" heavy duty weld hinges with brass pins

Adjustable leveling feet


Powder coated gray finish (see options).

Steel shelves adjust on 2-1/2" centers.

Manual close doors (open to full 180°)

Options:

Putty Powder Coat Finish - Code PP





NEW Product!

OPTIONAL PUTTY COLOR SHOWN

MODEL BR - MANUAL CLOSE

	INATION	LOLUGE			
Capacity (cu ft)	Catalog No.	Size (in) W x D x H	# Shelves	# Doors	Wgt. (Ibs)
35" HIGH					
8	BR8	23 X 18 X 35	2	1	150
12	BR12	34 X 18 X 35	2	2	190
16	BR16	23 X 34 X 35	2	1	210
44" HIGH					
10	BR10	23 X 18 X 44	3	1	180
14	BR14	34 X 18 X 44	3	2	230
19	BR19	43 X 18 X 44	3	2	280
20	BR20	23 X 34 X 44	3	1	290
65" HIGH					
15	BR15	23 X 18 X 65	4	1	258
23	BR23	34 X 18 X 65	4	2	348
29	BR29	43 X 18 X 65	4	2	424
30	BR30	23 X 34 X 65	4	1	384
43	BR43	34 X 34 X 65	4	2	474
55	BR55	43 X 34 X 65	4	2	544
75	BR75	59 X 34 X 65	4	2	666

U Fire Resistant Double Walled Security Cabinets

Model BX - Closed storage cabinet to secure materials or valuables (SELF CLOSING BI-FOLD DOORS)

FEATURES

All welded double wall 18 gauge construction with 1-1/2" insulating air space

Lockable flush handle with 2 sets of keys

Doors are double walled, 14 gauge outside & 18 gauge inside

Doors have 3 point locking system and radius edges

4" heavy duty weld hinges with brass pins

Adjustable leveling feet

Powder coated gray finish (see options)

Steel shelves adjust on 2-1/2" centers

Bi-fold door manual close

Options:

Putty Powder Coat Finish - Code PP



MODEL BX





MODEL B)	(- BI-FOLD)		
Capacity (cu ft)	Catalog No.	Size (in) W x D x H	# Shelves	Wgt. (Ibs)
19	BX19	43 X 18 X 44	3	278
29	BX29	43 X 18 X 65	4	396
43	BX43	34 X 34 X 65	4	480
55	BX55	43 X 34 X 65	4	550

SECURALL° Industrial / Commercial Security Cabinets

FEATURES

Rugged, all welded, 18 ga steel construction will provide years of service in both factory and office environments

EXCLUSIVE 1000 lb. capacity SUR-LOC easily adjustable steel shelving can be adjustable on 5" centers

Shelf braces gives extra reinforcement to the side walls to provide even more durability

Double wall cabinet doors feature full length piano hinges and a lockable flush mounted door handle for obstruction free, finger tip operation

3-point self-latching doors add even more convenient security

Shipped fully assembled and ready to use

Available in Beige or Gray

MODEL # SS184 BEIGE EXTERIOR DIMENSIONS (H X W X D) (84 X 36 X 18)"





MODEL # SS184 GRAY EXTERIOR DIMENSIONS (H X W X D) (84 X 36 X 18)"

herbertwilliams

Organize, store and	GENERAL	STORAGE SINGLE WALL CABINETS				
protect your most	MODEL	DESCRIPTION	NO. OF	CAPACITIES	EXTERIOR DIMENSIONS	SHIPPING WEIGHT
valuable tools and	NO.		SHELVES		APPROX. (H X W X D) IN.	APPROX. (LBS.)
materials with	SS142	SELF-LATCH STANDARD 2-DOOR	2	15 CUBIC FEET	42 X 36 X 18	151
materials with	SS172	SELF-LATCH STANDARD 2-DOOR	4	27 CUBIC FEET	72 X 36 X 18	264
these quality	SS184	SELF-LATCH STANDARD 2-DOOR	4	31 CUBIC FEET	84 X 36 X 18	300
Industrial/Commercial	SS242	SELF-LATCH STANDARD 2-DOOR	2	21 CUBIC FEET	42 X 36 X 24	200
Storage Cabinets	SS272	SELF-LATCH STANDARD 2-DOOR	4	36 CUBIC FEET	72 X 36 X 24	353
Siviage Gabillets	SS284	SELF-LATCH STANDARD 2-DOOR	4	42 CUBIC FEET	84 X 36 X 24	401

SECURALL Security Storage - with MEDECO High Security Lock

FEATURES

When you have a need for additional security these cabinets are designed to accommodate and protect your valuable or dangerous chemicals and other items from unauthorized use, fire and theft

Cabinets constructed of heavy 18 gauge steel with 1 1/2" air space throughout

Double swinging doors, plug welded full length piano hinges

Equipped with (MEDECO High Security) drill pick resistant lock, recessed into door to prevent breaking with a hammer or cutting chisel

MODEL # H007 EXTERIOR DIMENSIONS (H X W X D) (65 X 34 X 18)"





MODEL # S5001 EXTERIOR DIMENSIONS (H X W X D) (65 X 34 X 18)"

Also ideal for office use

		DOUBLE WALL CABINETS OF HEAVY GAUGE STEEL AND HIGH SECU NAUTHORIZED USE	JRITY LOCI	ς,	
MODEL No.	TEST LAB Approval	DESCRIPTION	NO. OF Shelves	EXTERIOR DIMENSIONS Approx. (H X W X D) IN.	SHIPPING WEIGHT Approx. (LBS.)
H007	*†	STORAGE OF VALUABLE CHEMICALS, DANGEROUS AND HAZARDOUS FLAMMABLES	4	65 X 34 X 18	303
S5001 H007 AN	*† D \$5001 MODELS	STORAGE OF OFFICE VALUABLES AND SHOP INSTRUMENTS. CARPET LINED SHELVES S ARE AVAILABLE IN BEIGE OR GRAY-PLEASE SPECIFY WHEN ORDERING	4	65 X 34 X 18	303

*Complies with OSHA regulations. + All cabinets are designed in accordance with specifications set forth by the National Fire Protection Association

U Heavy Duty Welded Security Storage Cabinets - Solid Door

Models DL, DS, HG - Durable closed storage cabinets to secure materials and valuables

FEATURES

All welded 14 gauge construction

Lockable doors, with lever handle, 3 point locking system. Doors open 180° (padlock not included)

Shelves adjust on 2-1/2" centers

Powder coated gray finish

Specifications:

Model DL - Heavy Duty

Includes four 14 gauge reinforced shelves with 1-1/2" lips

Overall height - 74"

1000 lbs Shelf Cap

Model DS - Super Heavy Duty

Includes four 14 gauge reinforced shelves with 2" lips, corners welded, and return bends for extra strength

4" high legs

Legs allow moving unit with fork lift truck

Overall height - 78"

1800 lbs Shelf Cap

Model HG

Includes two 14 gauge reinforced shelves with 1-1/2" lips

4" high legs

Legs allow moving of unit with fork lift truck

Overall height - 78"

1000 lbs Shelf Cap

Options:

Extra Shelf - Code RT (Models DL & HG only) Extra Shelf - Code ET (Model DS only)



MODEL DL SHOWN 1,000 LB CAPACITY PER SHELF



MODEL DS SHOWN 1,800 LB CAPACITY PER SHELF



MODEL DL - SOLID DOORS				
WxDxH (in)	Cat. No.	Wgt. (Ibs)		
18 X 36 X 74	DL136	320		
18 X 48 X 74	DL148	392		
18 X 60 X 74	DL160	464		
24 X 36 X 74	DL236	370		
24 X 48 X 74	DL248	450		
24 X 60 X 74	DL260	530		

MODEL DS - SUPER HEAVY DUTY SHELVES - SOLID DOORS				
WxDxH (in)	Cat. No.	Wgt. (Ibs)		
18 X 36 X 78	DS136	330		
18 X 48 X 78	DS148	404		
18 X 60 X 78	DS160	476		
24 X 36 X 78	DS236	380		
24 X 48 X 78	DS248	462		
24 X 60 X 78	DS260	544		



MODEL HG248 SHOWN 1,000 LB CAPACITY PER SHELF

MODEL HG - ST	ORAGE CA	BINET WITH I	DRAWERS
WxDxH (in)	Cat. No.	# of Drawers	Wgt. (Ibs)
24 X 36 X 78	HG236	3	430
24 X 48 X 78	HG248	6	586
24 X 60 X 78	HG260	9	734

U Heavy Duty Welded Security Storage Cabinets - Clearview Door

Durable closed storage, with clearview of contents, to secure materials and valuables

FEATURES

All welded 14 gauge construction

Clearview door panels are 13 gauge expanded mesh

Lockable doors, with lever handle, 3 point locking system. Doors open 180° (padlock not included)

Shelves adjust on 2-1/2" centers

Powder coated gray finish

Specifications:

Model DJ - Heavy Duty

Includes four 14 gauge shelves with 1-1/2" lips

Overall height - 74"

1000 lbs Shelf Cap

Model DM - Super Duty

Includes four 14 gauge reinforced shelves with 2" lips, corners welded, and return bends for extra strength

4" high legs

Legs allow moving unit with fork lift truck

Overall height - 78"

1800 lbs Shelf Cap

Model HU

Includes two 14 gauge reinforced shelves with 1-1/2" lips

Locking drawers (5"h x 16"w x 20"d) with 2 keys

4" high legs

Legs allow moving unit with fork lift truck

Overall height - 78"

1000 lbs Shelf Cap

Options:

Extra Shelf - Code RT (Models DJ & HU only) Extra Shelf - Code ET (Model DM only



MODEL DJ148 SHOWN 1,000 LB CAPACITY PER SHELF



Model DM148 Shown 1,800 LB Capacity Per Shelf



MODEL HU - CL	EARVIEW STOP	RAGE CABINET W	ITH DRAWERS
WxDxH (in)	Cat. No.	# of Drawers	Wgt. (Ibs)
24 X 36 X 78	HU236	3	416
24 X 48 X 78	HU248	6	562
24 X 60 X 78	HU260	9	700



MODEL DJ - C	LEARVIEV	V DOORS
WxDxH (in)	Cat. No.	Wgt. (Ibs)
18 X 36 X 74	DJ136	306
18 X 48 X 74	DJ148	368
18 X 60 X 74	DJ160	430
24 X 36 X 74	DJ236	354
24 X 48 X 74	DJ248	426
24 X 60 X 74	DJ260	496

MODEL DM - SUPER HEAVY DUTY SHELVES - CLEARVIEW DOORS				
WxDxH (in)	Cat. No.	Wgt. (Ibs)		
18 X 36 X 78	DM136	316		
18 X 48 X 78	DM148	380		
18 X 60 X 78	DM160	442		
24 X 36 X 78	DM236	364		
24 X 48 X 78	DM248	438		
24 X 60 X 78	DM260	510		

Model Hu248 Shown 1,000 LB Capacity Per Shelf

60 - HERBERT WILLIAMS FIRE EQUIPMENT LTD.

herbertwilliams

U Plastic Bin & Shelf - Welded Security Storage Cabinets - Clearview Doors

Durable closed storage, with clearview doors for storage of valuable parts

FEATURES

All welded 14 gauge construction

Clearview door panels are 13 gauge expanded mesh

Full louvered panel - back wall (Model DK only)

Yellow plastic bin sizes: Big Bins (16-1/2"w x 14-3/4"d x 7"h) Large Bins (8-1/4"w x 11"d x 7"h)

Lockable doors, with lever handle, 3 point locking system. Doors open 180° (padlock not included)

4" high legs.

Legs allow moving unit with fork lift truck.

Overall height - 78"

Powder coated gray finish.

Model GF:

Locking drawers (5"h x 16"w x 20"d) with 2 keys

Model DY:

Includes two 14 gauge reinforced shelves with 1-1/2" lips (1,000 lb capacity per shelf)

Full shelf rails allow shelves to be adjusted on 2-1/2" centers

Options:

Extra Shelf - Code RT (Model DY only)

Extra Big Bins - Code RG

Extra Large Bins - Code RB



MODEL DK248 SHOWN



MODEL DK - PL	ASTIC BINS	- CLEARV	IEW DOORS	
WxDxH (in)	Cat. No.	No. (Big	of Bins Large	Wgt. (Ibs)
24 X 36 X 78	DK236	18	0	336
24 X 48 X 78	DK248	18	9	404
24 X 60 X 78	DK260	27	0	512

·	·
MODEL CE2	

MODEL GF - PLASTIC BINS STORAGE CABINET WITH DRAWERS						
WxDxH	of Bins	Wgt.				
(in)	No.	Big	Large	(lbs)		
24 X 36 X 78	GF236	3	16	400		
24 X 48 X 78	GF248	6	20	542		
24 X 60 X 78	GF260	9	24	676		

MODEL GF248 SHOWN



MODEL DY - PLASTIC BINS & SHELVES - CLEARVIEW DOORS						
WxDxH Cat. No. of Bins Wgt						
(in)	No.	Big	Large	(lbs)		
24 X 36 X 78	DY236	0	16	382		
24 X 48 X 78	DY248	0	20	470		
24 X 60 X 78	DY260	0	24	540		

MODEL DY248 SHOWN

U Plastic Bin Welded Security Storage Cabinets – Solid Doors

Models DF, DP, DE - Durable closed storage cabinets for small part inventory organization

FEATURES

All welded 14 gauge	construction (walls & shelves)
---------------------	--------------------------------

Full louvered panels - back wall & doors
--

Yellow plastic bin sizes:

Backwall:	Big bins (16-1/2"w x 14-3/4"d x 7"h)
	Large Bins (8-1/4"w x 11"d x 7"h)
	Medium Bins (5"w x 5-1/2"d x 11"h)
Doors:	Small bins (4-1/8"w x 7-1/2"d x 3"h)
Lockable doors	with lever handle, 3 point lock system

doors open full 180° (padlock not included)

4" high legs

Legs allow moving of unit with fork lift truck

Overall height - 78"

Powder coated gray finish

Options:

Extra Big Bins - Code RG

Extra Large Bins - Code RB

Extra Medium Bins - Code RC

Extra Small Bins - Code RD

Here			
222			
222		1	
الببيا		- 1	-
222		-	
		-	شليت
	Sugar State	the second second	

MODEL DF SHOWN



MODEL DF - MIXED SIZE PLASTIC BINS						
WxDxH (in)	Cat. No.	l Big	No. of Bin Large	is Small	Wgt. (Ibs)	
24 X 36 X 78	DF236	10	16	96	406	
24 X 48 X 78	DF248	10	25	128	510	
24 X 60 X 78	DF260	15	24	160	612	

		internet and
	1	
	-	
	-	=(888
	1	
833	1-	_88

MODEL DP – MIXED SIZE PLASTIC BINS							
WxDxH (in)	Cat. No.	Big	No. of Bin Large	s Small	Wgt. (Ibs)		
24 X 36 X 78	DP236	18	0	96	402		
24 X 48 X 78	DP248	18	9	128	506		
24 X 60 X 78	DP260	27	0	160	592		

MODEL DP SHOWN



MODEL DE - MAX-MIXED PLASTIC BIN CABINET No. of Bins Large Medium Small Wgt. (Ibs) Cat. WxDxH (in) No. Big 24 X 36 X 78 96 412 DE236 0 16 24 24 X 48 X 78 DE248 18 24 128 518 6 24 X 60 X 78 DE260 9 21 30 170 628